

**Use of the VIRYA-1, the VIRYA-1.02 or the VIRYA-1.04 for pumping of drinking water  
using a 12 V battery and a pump with a 12 V, DC motor**

ing. A. Kragten

May 2019  
reviewed August 2019

KD 672

It is allowed to copy this report for private use.

Engineering office Kragten Design  
Populierenlaan 51  
5492 SG Sint-Oedenrode  
The Netherlands  
telephone: +31 413 475770  
e-mail: [info@kdwindturbines.nl](mailto:info@kdwindturbines.nl)  
website: [www.kdwindturbines.nl](http://www.kdwindturbines.nl)

Contains		page
1	Introduction	3
2	Determination of the required daily pumping energy	4
3	Determination of the generated daily windmill energy	5
4	Determination of the battery capacity	7
5	References	8

## 1 Introduction

The VIRYA-1, the VIRYA-1.02 and the VIRYA-1.04 windmills are described in folders which can be copied from my website: [www.kdwindturbines.nl](http://www.kdwindturbines.nl) at the menu VIRYA-folders.

Design calculations of the 2-bladed VIRYA-1 rotor and description of the PM-generator are given in report KD 679 (ref. 1). This report also contains drawings of the rotor and the generator. Design calculations of the 3-bladed VIRYA-1.02 rotor are given in report KD 678 (ref. 2). This report also contains a drawing of the rotor. The VIRYA-1 and the VIRYA-1.02 make both use of the same 8-pole, 3-phase axial flux PM-generator. Design calculations of the 3-bladed VIRYA-1.04 rotor are given in report KD 518 (ref. 3). The VIRYA-1.04 makes use of a Nexus hub dynamo.

The VIRYA-1 and the VIRYA-1.02 make both use of the same head as used for the VIRYA-1.04 windmill. The drawings of the head are given in a separate manual of the VIRYA-1.04 (ref. 4). All three windmills are meant for 12 V battery charging. All mentioned reports and manuals can be found on my website at the menu KD-reports.

The housing of the generator of the VIRYA-1 and the VIRYA-1.02 is made from the front wheel hub of a mountain bike. The generator has a stator sheet which is made from 3 mm galvanised steel sheet and eddy currents are generated in this sheet. But the coils which are mounted at the front side of the stator sheet contain no iron. The sticking torque of the generator is therefore not fluctuating which facilitates starting of the rotor.

The generator has been measured recently and the measured  $P_{\text{mech-n}}$ ,  $P_{\text{el-n}}$  and  $\eta\text{-n}$  curves are given in chapter 6 of report KD 678. Measurements of the unloaded torque are given in chapter 8 of report KD 679. These measurements show that the increase of the sticking torque due to the eddy currents is acceptably low and that the rise of the sticking torque has no substantial influence on the starting behaviour of the VIRYA-1 rotor.

The generated power is stored in a 12 V battery. It is specified that this battery should have a capacity of at least 60 Ah. It is assumed that the maximum charging current is that low that no battery charge controller with dump load is needed to prevent over charging when the battery is full. However, it has to be checked in practice if this is really true. If the maximum charging voltage becomes higher than about 14 V, one must use a bigger battery or a battery charge controller is needed. A 200 W battery charge controller for a 24 V battery is described in a public manual (ref. 5). This battery charge controller can be modified for a 12 V battery. Then the maximum power which can be dissipated is only 180 W but this is certainly enough for the VIRYA-1 or the VIRYA-1.02. This modification is described in the end of chapter 6 of the manual.

The stored energy can be used to power small LED lamps or other small 12 V equipment. It seems possible to power a small water pump if this pump is equipped with a 12 V, DC motor. Such pumps are manufactured by for instance the companies Flojet or Shurflo. A small Shurflo pump type: "Shurflo Trail King water pump" for use in caravans is supplied by for instance the Dutch company De Wit from Schijndel, website: [www.DeWitSchijndel.nl](http://www.DeWitSchijndel.nl). The flow of this pump is 10.6 liter/min at a pressure of 2.8 bar. The current price is € 71,99.

Even a pump with the smallest motor will require an electrical power which is much larger than the power which can be supplied by the windmill at low wind speeds. So a battery will certainly be necessary. So pumping takes place only during a short period and the energy generated by the windmill in the remaining hours is stored in the battery. To verify if the VIRYA-1, the VIRYA-1.02 or the VIRYA-1.04 is large enough for water pumping, first the required daily pumping energy has to be determined.

## 2 Determination of the required daily pumping energy

The idea to use one of the small VIRYA-windmills for water pumping was initiated by a teacher of a Dutch technical school who wants to stimulate people in Gambia to pump drinking water by locally manufactured small wind turbines. He told me that the water was pumped from hand dug open wells for which the average water level is about 10 m deep. But the maximum water level is about 15 m deep. I assume that the water is pumped in a reservoir which is positioned about 2 m above ground level so the maximum total height  $H = 17$  m.

I have no idea of the amount of drinking water which is required per person per day in Gambia so first I have investigated what is used in The Netherlands and compared that with my own use. I live together with my wife so we have a 2-persons household. The Dutch average use for a 2-persons household is  $93 \text{ m}^3$  per year. Our use is about  $48 \text{ m}^3$  per year so far below the average. We use the water for drinking, washing and cooking of food, washing of clothes, showering, toilet flushing and during dry periods for the vegetable garden. Our rather low water use is mainly realised by minimising the use of toilet water and short showering periods.  $48 \text{ m}^3$  per year for a 2-persons household means about 66 litre per day per person.

If there is shortage of water or of energy to pump water, one must be more economical with water than we are. I think that if 40 litre water is available per person per day one still can have a comfortable life. Assume a family in Gambia has about five members so one needs about 200 litres of water per day per family. It doesn't mean that the reservoir must have a capacity of 200 litres. May be 20 litres is enough. It might even be possible to cancel the whole reservoir if the flow of the pump is large enough. Assume that 200 litres per day has to be pumped by one wind turbine per family. The required hydraulic power  $P_{\text{hyd}}$  to pump a certain flow of water  $q$  upwards against a height  $H$  is given by the formula:

$$P_{\text{hyd}} = \rho_w * g * H * q \quad (\text{W}) \quad (1)$$

In this formula, the hydraulic power  $P_{\text{hyd}}$  is the potential power which the water has gained after lifting up to the height  $H$ . So  $P_{\text{hyd}}$  is not the electrical power needed to drive the pump motor.  $\rho_w$  is the density of water which is  $1000 \text{ kg/m}^3$ .  $g$  is the acceleration of gravity which is  $9.81 \text{ m/s}^2$ .  $H$  is the static height and it was chosen that  $H = 17$  m.  $q$  is the flow in  $\text{m}^3/\text{s}$ . It was estimated that one needs 200 litres of water per day so  $0.2 \text{ m}^3$  per day. A day has  $3600 * 24 = 86400$  seconds. So the flow  $q = 0.2 / 86400 = 0.000002315 \text{ m}^3/\text{s}$ . Substitution of these values in formula 1 gives that  $P_{\text{hyd}} = 0.386 \text{ W}$ . This is a very low hydraulic power.

The hydraulic energy  $E_{\text{hyd}}$  which the amount of water has gained during a certain time  $t$  is given by:

$$E_{\text{hyd}} = P_{\text{hyd}} * t \quad (\text{Joule or Ws}) \quad (2)$$

In the formula  $t$  is the time in seconds. Assume that the pumping time is one day so  $t = 3600 * 24 = 86400$  s. Substitution of  $P_{\text{hyd}} = 0.386 \text{ W}$  and  $t = 86400$  s in formula 2 gives that  $E_{\text{hyd}} = 33350 \text{ Joule}$ .

The average electrical power  $P_{\text{el}}$  which has to be produced by the windmill is much higher than  $P_{\text{hyd}}$  because of the pump efficiency  $\eta_p$ , the pump motor efficiency  $\eta_m$  and the battery efficiency  $\eta_b$ . The efficiencies are taken as a factor of 1, so not as a percentage. It is assumed that the pump is pumping only during some minutes a day. So almost all the needed energy is extracted from the battery.

The energy which is directly supplied by the windmill and not stored in the battery, is neglected.  $P_{el}$  is given by:

$$P_{el} = P_{hyd} / (\eta_p * \eta_m * \eta_b) \quad (3)$$

If a small pump of manufacture Shurflo is chosen, this pump will be equipped with three diaphragms. Such a pump will have an efficiency of about 0.6. Assume that the pump motor has an efficiency of 0.7. Assume the battery has also an efficiency of 0.7. The cable losses are neglected. Substitution of these values and  $P_{hyd} = 0.386$  W in formula 3 gives that  $P_{el} = 1.31$  W. This is still a very low power. The electrical energy  $E_{el}$  which is needed during a certain time  $t$  is given by:

$$E_{el} = P_{el} * t \quad (\text{Joule}) \quad (4)$$

In the formula  $t$  is the time in seconds. Assume the pumping time is one day so  $t = 3600 * 24 = 86400$  s. Substitution of  $P_{el} = 1.31$  W and  $t = 86400$  s in formula 4 gives that  $E_{el} = 113184$  Joule. This is a low amount of energy and it can be expected that all three windmills can generate this energy in one day at low wind speeds.

### 3 Determination of the generated daily windmill energy

The  $P_{el}$ - $V$  curves of the VIRYA-1 and the VIRYA-1.04 are given on the first page of the first English folder. This graph is copied as figure 1. The  $P_{el}$ - $V$  curve of the VIRYA-1.02 is given on the first page of the second English folder. This  $P_{el}$ - $V$  curve is copied in figure 1.

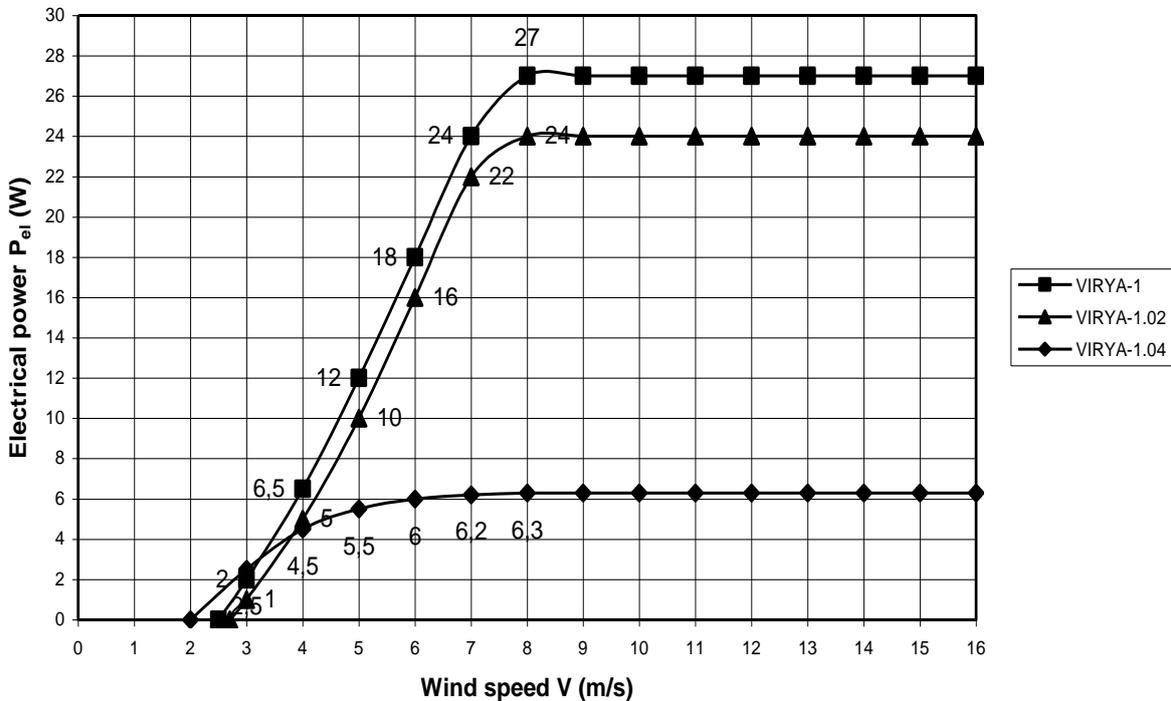


fig. 1  $P_{el}$ - $V$  curves of the VIRYA-1, the VIRYA-1.02 and the VIRYA-1.04

In figure 1 it can be seen that the  $P_{el}$ - $V$  curve of the VIRYA-1 has a cut-in wind speed of 2.5 m/s. The  $P_{el}$ - $V$  curve of the VIRYA-1.02 has a cut-in wind speed of 2.7 m/s. The  $P_{el}$ - $V$  curve of the VIRYA-1.04 has a cut in wind speed of 2 m/s. The maximum power of the VIRYA-1 is 27 W. The maximum power of the VIRYA-1.02 is 24 W. The maximum power of the VIRYA-1.04 = 6.3 W. The rated wind speed of all three windmills is 8 m/s.

The electrical power  $P_{el}$  at a certain constant wind speed  $V$  can be read in the graph for every wind speed. The wind speed at a certain place will vary continuously and depends on the season and the day but also on the height of the tower. Sometimes the average wind speed is known for a certain season. As water is a basic need, one has to choose the season with the lowest average wind speed for the calculation of the windmill power. The generated energy in a certain time for a certain average wind speed is higher than for the same constant wind speed because the  $P_{el}$ - $V$  curve isn't a straight line through the origin. The difference depends on the fluctuation of the wind speed and on the difference in between the average wind speed and the cut-in wind speed. This effect is explained using the  $P_{el}$ - $V$  curve of the VIRYA-1.

Assume we have a constant wind speed of 4 m/s. In figure 1 it can be read that  $P_{el} = 6.5$  W. Assume we have an average wind speed of 4 m/s and the wind speed is 3 m/s for half the time and 5 m/s for half the time.  $P_{el} = 2$  W for  $V = 3$  m/s and  $P_{el} = 12$  W for  $V = 5$  m/s. So the average value of  $P_{el} = (2 + 12) / 2 = 7$  W. This is 0.5 W higher than for a constant wind speed of 4 m/s. Assume we have an average wind speed of 4 m/s and the wind speed is 2 m/s for half the time and 6 m/s for half the time.  $P_{el} = 0$  W for  $V = 2$  m/s and  $P_{el} = 18$  W for  $V = 6$  m/s. So the average value of  $P_{el} = (0 + 18) / 2 = 9$  W. This is 2.5 W higher than for a constant wind speed of 4 m/s.

Assume we have a constant wind speed of 3 m/s. In figure 1 it can be read that  $P_{el} = 2$  W. Assume we have an average wind speed of 3 m/s and the wind speed is 2 m/s for half the time and 4 m/s for half the time.  $P_{el} = 0$  W for  $V = 2$  m/s and  $P_{el} = 6.5$  W for  $V = 4$  m/s. So the average value of  $P_{el} = (0 + 6.5) / 2 = 3.25$  W. This is 1.25 W higher than for a constant wind speed of 3 m/s. Assume we have an average wind speed of 3 m/s and the wind speed is 1 m/s for half the time and 5 m/s for half the time.  $P_{el} = 0$  W for  $V = 1$  m/s and  $P_{el} = 12$  W for  $V = 5$  m/s. So the average value of  $P_{el} = (0 + 12) / 2 = 6$  W. This is 4 W higher than for a constant wind speed of 3 m/s.

Assume we have a constant wind speed of 2 m/s. In figure 1 it can be read that  $P_{el} = 0$  W. Assume we have an average wind speed of 2 m/s and the wind speed is 1 m/s for half the time and 3 m/s for half the time.  $P_{el} = 0$  W for  $V = 1$  m/s and  $P_{el} = 2$  W for  $V = 3$  m/s. So the average value of  $P_{el} = (0 + 2) / 2 = 1$  W. This is 1 W higher than for a constant wind speed of 2 m/s. Assume we have an average wind speed of 2 m/s and the wind speed is 0 m/s for half the time and 4 m/s for half the time.  $P_{el} = 0$  W for  $V = 0$  m/s and  $P_{el} = 6.5$  W for  $V = 4$  m/s. So the average value of  $P_{el} = (0 + 6.5) / 2 = 3.25$  W. This is 3.25 W higher than for a constant wind speed of 2 m/s and even 1.25 W higher than for a constant wind speed of 3 m/s. So even if the average wind speed is lower than the cut-in wind speed, some power will be generated because of the fluctuation of the wind speed!

The values of  $P_{el}$  are now read in figure 1 for the VIRYA-1, the VIRYA-1.02 and the VIRYA-1.04 windmills and for constant wind speeds  $V$  of 3, 4 and 5 m/s. The electrical energy  $E_{el}$  is calculated using formula 4 for a period of one day, so for  $t = 86400$  s. The result of the calculations is given in table 1.

	$V = 3$ m/s		$V = 4$ m/s		$V = 5$ m/s	
	$P_{el}$ (W)	$E_{el}$ (Joule/day)	$P_{el}$ (W)	$E_{el}$ (Joule/day)	$P_{el}$ (W)	$E_{el}$ (Joule/day)
VIRYA-1	2	172800	6.5	561600	12	1036800
VIRYA-1.02	1	86400	5	432000	10	864000
VIRYA-1.04	2.5	216000	4.5	388800	5.5	475200

Table 1 Read values of  $P_{el}$  (W) and calculated values of  $E_{el}$  (Joule/day) for three different windmills and three different constant wind speeds

In chapter 2 it was calculated that the required electrical energy  $E_{el} = 113184$  Joule/day. So the VIRYA-1 and the VIRYA-1.04 are able to generate this energy easily at a constant wind speed of only 3 m/s. The VIRYA-1.02 needs a little higher constant wind speed than 3 m/s to generate the required daily energy but at 4 m/s the generated daily energy is already higher than for the VIRYA-1.04. I advise to build the VIRYA-1 or the VIRYA-1.02 because for these windmills, at higher wind speeds, a lot of energy is left for other goals than water pumping or one can pump the required amount of water from deeper wells.

#### 4 Determination of the battery capacity

Information about lead sulphuric acid batteries is given in chapter 3 of report KD 378 (ref. 6). The capacity of a 12 V battery is normally given in Ah for a discharge time of 10 hours. This means that a 60 Ah battery is discharged with a current  $I = 6$  A during 10 hours and that the minimum discharge voltage of about 10.6 V is reached at the end of the discharge time. The capacity is larger if the battery is discharged with a smaller current during a longer time and smaller if the battery is discharged with a larger current during a shorter time. The average discharge voltage  $U_{av}$  for a discharge time of 10 hours is about 11.3 V. The available energy  $E_a$  in Joule or Ws is given by formula 11 of KD 378 which is copied as formula 5.

$$E_a = I * U_{av} * 36000 \quad (\text{Joule}) \quad (5)$$

The battery must be chosen as large as possible for three reasons. The first reason is that one must be able to bridge a long windless period. The second reason is that the charging voltage may not become too high if the battery is full and if no battery charge controller is used. The VIRYA-1 has a maximum power of about 27 W. This means that the maximum charging current is about 1.93 A for a charging voltage of 14 V. The bigger the battery, the lower the charging voltage will be for a full battery for this charging current. The third reason is that the discharge current must be not too high otherwise the battery efficiency becomes too low. The discharge current depends on the chosen pump and pump motor and on the height H for which it is used.

Assume a 60 Ah battery is chosen which is discharged in 10 hours, so  $I = 6$  A. Substitution of  $I = 6$  A and  $U_{av} = 11.3$  V gives that  $E_a = 2440800$  Joule. In chapter 2 it was calculated that the required hydraulic energy  $E_{hyd} = 33350$  Joule. The electric energy which is needed by the pump motor  $E_{elpm}$  is given by:

$$E_{elpm} = E_{hyd} / (\eta_p * \eta_m) \quad (\text{Joule}) \quad (6)$$

Substitution of  $E_{hyd} = 33350$  Joule,  $\eta_p = 0.6$  and  $\eta_m = 0.7$  in formula 6 gives that  $E_{elpm} = 79405$  Joule. So this is lower than the energy  $E_{el} = 113184$  Joule which has to be supplied daily by the generator but that's because the battery efficiency is not taken into account if the battery capacity is taken. The available energy in a full 60 Ah battery is a factor  $2440800 / 79405 = 30.7$  larger than the required daily energy for water pumping. So a 60 Ah battery can bridge a period of 30.7 days if no other energy is taken from the battery than for water pumping and if the battery has no self discharge. This is a very long period and it might be allowed to take a smaller battery if bridging a wind still period was the only criterion to select the battery capacity. However, a smaller battery may require a battery charge controller and the extra costs of this device may completely neutralise the lower costs of a smaller battery. As the windmill won't be used only for pumping water, it is nice to have a big battery which allows the use of other equipment during windless periods.

## 5 References

- 1 Kragten A. Development of an 8-pole, 3-phase axial flux permanent magnet generator for the VIRYA-1 windmill using a bicycle hub and 8 neodymium magnets size  $\phi 25 * 12$  mm and a stator sheet made out of galvanised steel sheet, August 2019, free public report KD 679, engineering office Kragten Design, Populierenlaan 51, 5492 SG Sint-Oedenrode, The Netherlands.
- 2 Kragten A. Calculations executed for the 3-bladed rotor of the VIRYA-1.02 windmill ( $\lambda_d = 3.5$ ,  $15^\circ$  folded stainless steel blades) meant to be coupled to the VIRYA-1 generator, June 2019, reviewed August 2019, public report KD 678, engineering office Kragten Design, Populierenlaan 51, 5492 SG Sint-Oedenrode, The Netherlands.
- 3 Kragten A. Calculations executed for the 3-bladed rotor of the VIRYA-1.04 windmill ( $\lambda_d = 3.5$ , 7.14 % cambered, aluminium blades) meant to be coupled to a Nexus hub dynamo (with free manual), January 2013, reviewed May 2013, free public report KD 518, engineering office Kragten Design, Populierenlaan 51, 5492 SG Sint-Oedenrode, The Netherlands.
- 4 Kragten A. Manual of electricity generating windmill VIRYA-1.04, February 2013, reviewed May 2013, free manual, engineering office Kragten Design, Populierenlaan 51, 5492 SG Sint-Oedenrode, The Netherlands.
- 5 Kragten A. Manual of a 27.6, 200 W battery charge controller, March 2006, modified December 2016, free manual, engineering office Kragten Design, Populierenlaan 51, 5492 SG Sint-Oedenrode, The Netherlands.
- 6 Kragten A. Basic knowledge about electrical, chemical, mechanical, potential and kinetic energy to understand literature about the generation of energy by small wind turbines, May 2008, free public report KD 378, engineering office Kragten Design, Populierenlaan 51, 5492 SG Sint-Oedenrode, The Netherlands.