

**Aerodynamic characteristics of rectangular flat plates with aspect ratios  
5 : 1, 2 : 1, 1 : 1, 1 : 2 and 1 : 5 for use as windmill vane blades**

ing. A. Kragten

March 2014  
reviewed September 2020

KD 551

It is allowed to copy this report for private use.

Engineering office Kragten Design  
Populierenlaan 51  
5492 SG Sint-Oedenrode  
The Netherlands  
telephone: +31 413 475770  
e-mail: [info@kdwindturbines.nl](mailto:info@kdwindturbines.nl)  
website: [www.kdwindturbines.nl](http://www.kdwindturbines.nl)

Contains	page
1 Introduction	3
2 The square flat plate	4
3 The rectangular flat plate for aspect ratios 2 : 1 and 1 : 2	8
4 The rectangular flat plate for aspect ratios 5 : 1 and 1 : 5	9
5 Comparing of the measurements	12
6 Correction of the measurements for aspect ratios 2 : 1 and 1 : 2 for tunnel blockage	13
7 Determination of the moment coefficient $C_{mh}$ around a point H for a square plate	15
8 Determination of the moment coefficient $C_{mh}$ around a point H for an aspect ratio 1 : 5	19
9 References	21

## 1 Introduction

In report R443D (ref. 1) of the former Wind Energy Group of the University of Technology Eindhoven, about eighty airfoils are assembled which have been measured for low Reynolds numbers. A problem with this report is that most of the given airfoil graphs are too small for use in rotor blade calculations. Fortunately the original measuring points are given for almost all airfoils and using these points, new accurate graphs can be made.

Rectangular flat plates are normally not used for rotor blades because the minimum  $C_d/C_l$  ratio is too high. However, they can be used for vane blades very well. The combination of a vane blade and a vane arm is called a vane. Vanes can have two different functions. Main vanes keep the rotor and the head of a windmill in the wind and auxiliary vanes or side vanes push the rotor and the head out of the wind. Side vanes are used when the rotor axis has no eccentricity with respect to the tower axis. Main vane blades with many different shapes are used but for most shapes no aerodynamic characteristics are available and in this case the aerodynamic behaviour of the vane can only be found by try and error.

A main vane is normally used to keep the rotor in the wind but the combination of the main vane and an eccentric rotor or a main vane and a side vane can also be used as a safety system to turn the rotor out of the wind at high wind speeds. In report KD 485 (ref. 2) five different safety systems are described which turn the rotor out of the wind at high wind speeds.

A vane blade is normally positioned with the vane blade area vertically. The aspect ratio of a vane blade is the ratio in between the vane blade height  $h$  and the vane blade width  $w$ . So for a vane blade with an aspect ratio 1 : 2, the height is half the width. If the plate is seen as an aerodynamic airfoil, the width  $w$  corresponds to the chord  $c$  and height  $h$  corresponds to the length  $l$ . Aerodynamic airfoils are measured in a wind tunnel with the length  $l$  horizontally.

The characteristics of a vane blade are normally given as the variation of the lift coefficient  $C_l$  and the drag coefficient  $C_d$  as a function of the angle of attack  $\alpha$ . These parameters are defined in chapter 3 of report KD 35 (ref. 3). However, for a vane blade, one is normally only interested in the component of lift  $L$  and drag  $D$  perpendicular to the vane blade. This component is called the normal force  $N$  and the coefficient is called the normal coefficient  $C_n$ . The  $C_n$ - $\alpha$  curves for rectangular plates with aspect ratios 5 : 1, 1 : 1 (square plate) and 1 : 5 are given in figure 13 of report R999D (ref. 4). The  $C_n$ - $\alpha$  curves for rectangular plates with aspect ratios 2 : 1 and 1 : 2 are given in figure 31 of report R999D. I have a copy of this report but as this report is no longer available, it seems useful to put the aerodynamic characteristics of rectangular plates with these five aspect ratios together in this report KD 551.

The aerodynamic characteristics of rectangular flat plates with aspect ratios 5 : 1, 1 : 1 and 1 : 5 are also given in report R443D (ref. 1). I have a copy of this report but this report is no longer available. The measurements are originally performed by Flagsbart. The original measurements were published in: Messungen an ebenen und gewölbten platten (in German, ref. 5). The characteristics are given as  $C_l/C_d$  curves and  $C_l/C_m$  curves in R443D but the original measuring points are also given in tables as a function of  $\alpha$ , so it is easy to derive the wanted curves. The characteristics for a square plate are almost identical to the characteristics of a circular plate. The characteristics for square plates were measured for four different Reynolds values  $2 * 10^5$ ,  $4 * 10^5$ ,  $6 * 10^5$  and  $8 * 10^5$  but no different characteristics are given. This means that the characteristics for square plates are almost independent of the Reynolds number. The characteristics for rectangular plates with aspect ratios 5 : 1 and 1 : 5 were measured only for the Reynolds value  $4 * 10^5$ .

The characteristic for rectangular plates with aspect ratios 2 : 1 and 1 : 2 were measured by a student in the wind tunnel of the department of Physics of the University of Technology Eindhoven. The results are presented in report R487S (ref. 6).

However, I don't have a copy of this report and so the original measuring points aren't available. So the  $C_n$ - $\alpha$  curves of figure 31 of report R999D were copied as accurately as possible. The original  $C_l$ - $\alpha$  and  $C_d$ - $\alpha$  characteristics from which the  $C_n$ - $\alpha$  curves are derived are also not available. It isn't known for which Reynolds values the measurements are valid but I think it will be around  $2 * 10^5$ .

## 2 The square flat plate

The table with measuring points for the square flat plate is given at page 3-4 of R443D (ref. 1). This table is copied as table 1. Apart from the lift coefficient  $C_l$  and the drag coefficient  $C_d$ , the moment coefficient  $C_m$  is also given. The aerodynamic moment  $M$  and the moment coefficient  $C_m$  are normally taken around the quart chord point but for the square flat plate they are taken around the airfoil nose. The lift  $L$  and the drag  $D$  also have the airfoil nose as point of application. The left hand direction of the aerodynamic moment is positive if the wind is coming from the left side and if the angle of attack  $\alpha$  is positive (see figure 1).

The lift force  $L$  and the drag force  $D$  can be dissolved into a component perpendicular to the plate and in a component in line with the plate. The sum of the components of  $L$  and  $D$  perpendicular to the plate is the normal force  $N$ . The normal coefficient  $C_n$  is given by:

$$C_n = C_l * \cos \alpha + C_d * \sin \alpha \quad (-) \quad (1)$$

The difference in between the drag component  $C_d * \cos \alpha$  and the lift component  $C_l * \sin \alpha$  in the direction of the plate is small and can be neglected, also because this force gives no moment around the turning axis of the vane arm. The calculated  $C_n$  values using formula 1 are also given in table 1. For a vane blade, it isn't easy to calculate the vane moment around the turning axis of the vane arm, using the normal force  $N$  and the aerodynamic moment  $M$ . Therefore, the normal force  $N$  is assumed to have a point of application at a certain distance  $i$  from the nose (see figure 1). The distance  $i$  is chosen such that the moment produced by the normal force is equal to the aerodynamic moment  $M$ .

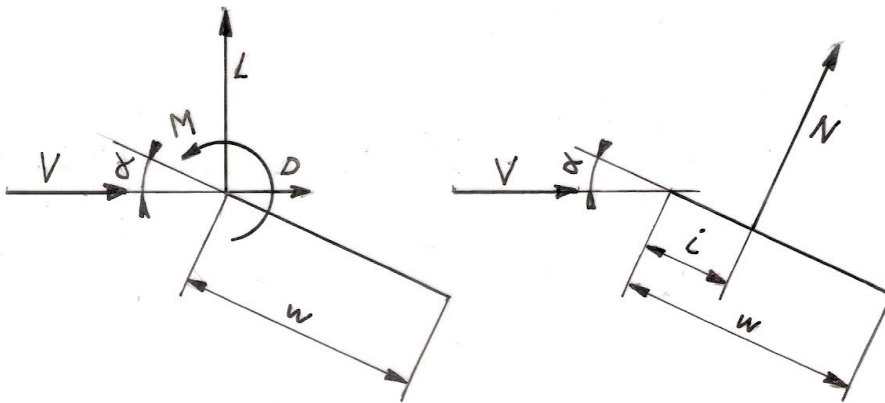


fig. 1 Replacement of the  $L$ ,  $D$  and  $M$  by  $N$  at a distance  $i$  from the nose

It can be derived that:

$$i / w = C_m / C_n \quad (2)$$

The calculated values of  $i / w$  are also given in table 1.

$\alpha$ (°)	$C_l$ (-)	$C_d$ (-)	$C_m$ (-)	$C_n$ (-)	$i/w$ (-)
0	0	0.0232	0	0	-
5.0	0.161	0.0363	0.035	0.164	0.213
9.9	0.361	0.0842	0.098	0.370	0.265
14.9	0.591	0.176	0.193	0.616	0.313
19.9	0.831	0.313	0.299	0.885	0.338
24.6	1.015	0.479	0.402	1.122	0.358
34.7	1.300	0.904	0.606	1.583	0.383
37.7	1.330	1.026	0.668	1.680	0.398
39.7	1.327	1.100	0.708	1.724	0.411
40.7	1.323	1.101	0.724	1.721	0.421
37.9	0.887	0.703	0.478	1.132	0.422
39.9	0.840	0.709	0.463	1.099	0.421
40.9	0.832	0.722	0.467	1.102	0.424
41.9	0.821	0.737	0.480	1.103	0.435
46.9	0.751	0.799	0.472	1.097	0.430
54.9	0.655	0.925	0.493	1.133	0.435
64.4	0.484	1.020	0.505	1.129	0.447
75.0	0.302	1.085	0.528	1.126	0.469
90.0	0	1.150	0.566	1.150	0.492

table 1  $C_l$ ,  $C_d$ ,  $C_m$ ,  $C_n$  and  $i/w$  for a square plate as a function of  $\alpha$

The measured  $C_l$ - $\alpha$ , the  $C_d$ - $\alpha$  and the  $C_m$ - $\alpha$  curves are given in figure 2, 3 and 4.

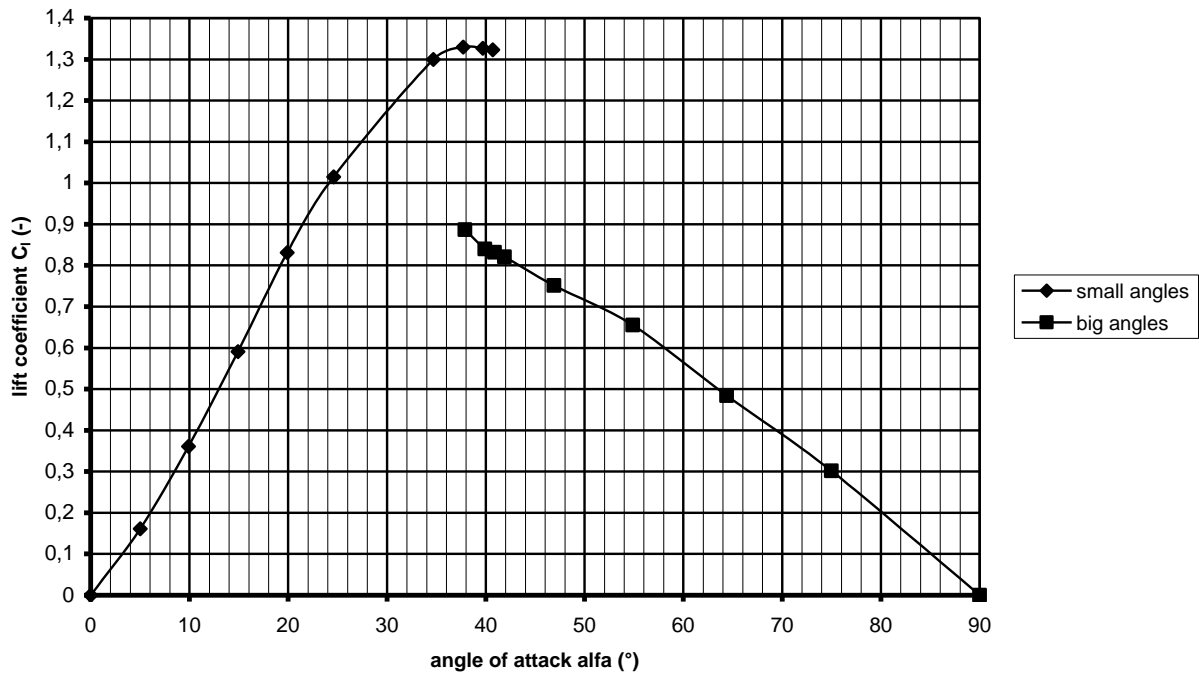


fig. 2 Measured values of  $C_l$  as a function of  $\alpha$  for a square flat plate

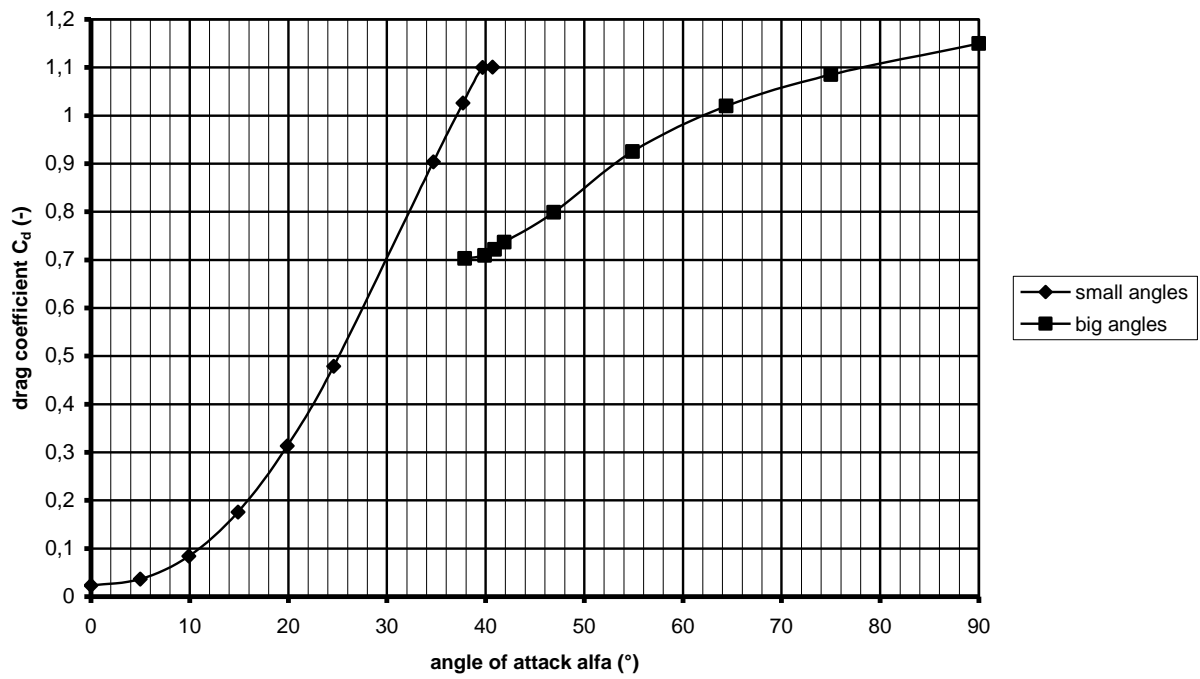


fig. 3 Measured values of  $C_d$  as a function of  $\alpha$  for a square flat plate

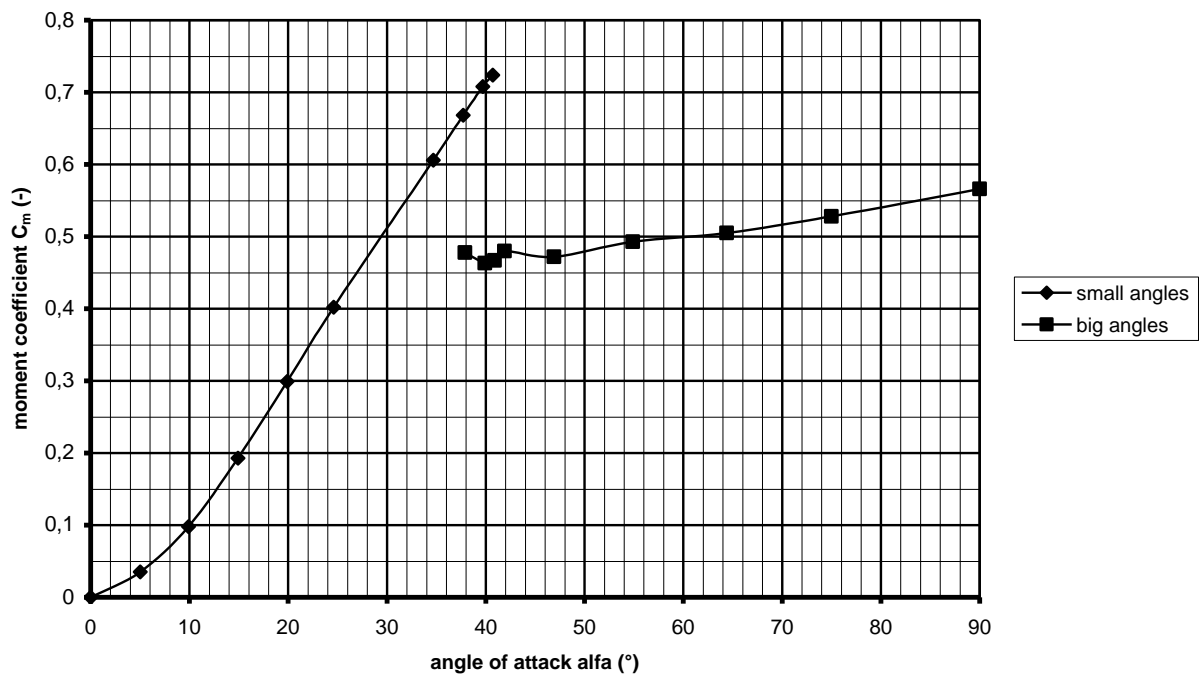


fig. 4 Measured values of  $C_m$  as a function of  $\alpha$  for a square flat plate

The calculated values of  $C_n$  as a function of  $\alpha$  are given in the  $C_n$ - $\alpha$  curve of figure 5.

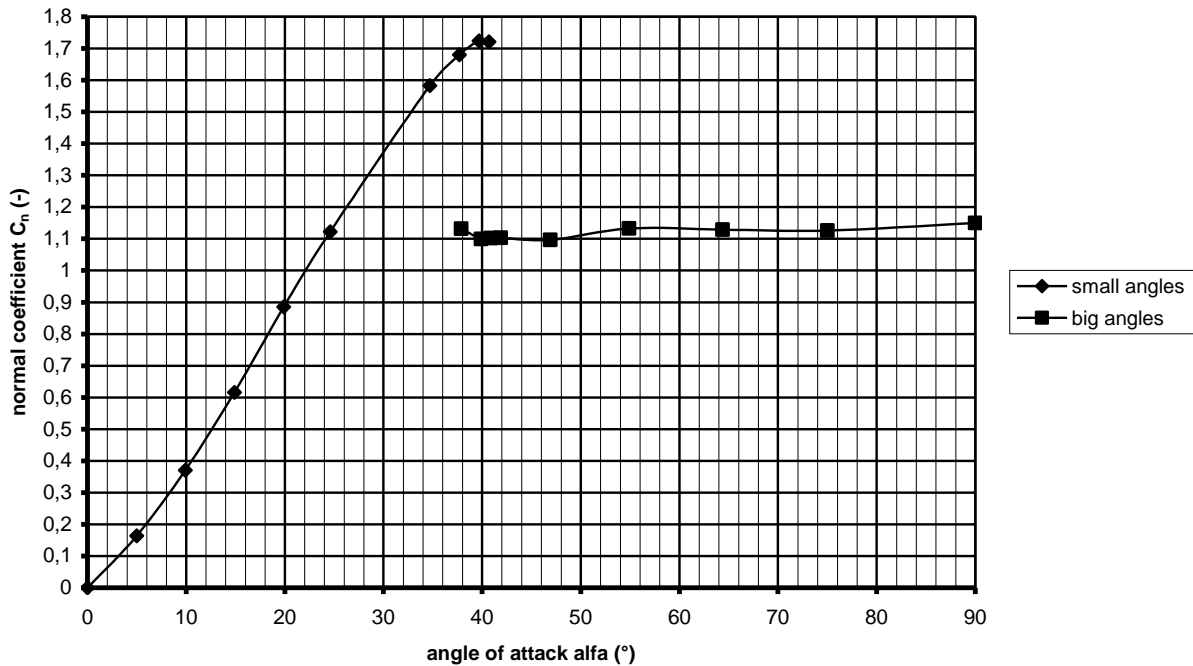


fig. 5 Calculated values of  $C_n$  as a function of  $\alpha$  for a square flat plate

The calculated values of  $i/w$  as a function of  $\alpha$  are given in the  $i/w$ - $\alpha$  curve of figure 6.

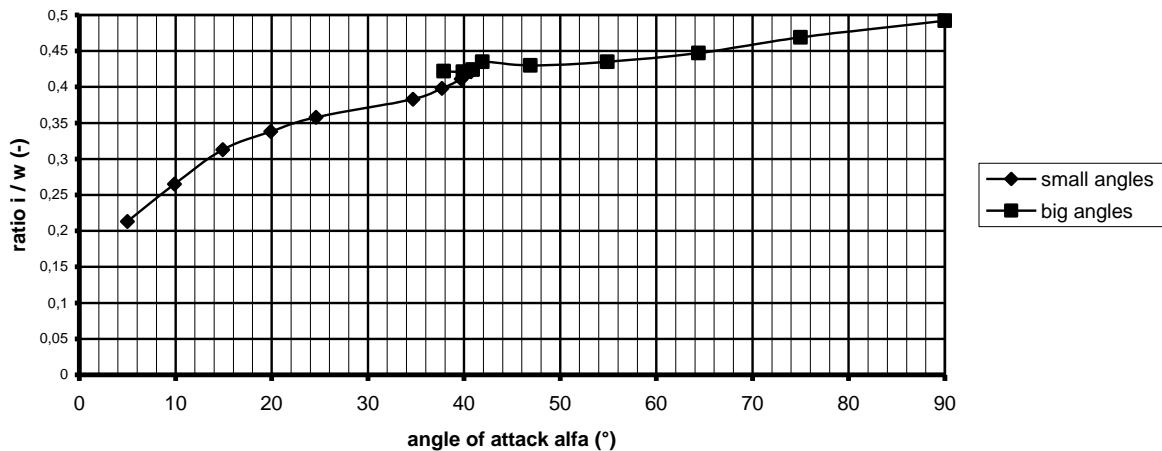


fig. 6 Calculated values of  $i/w$  as a function of  $\alpha$  for a square flat plate

In figure 5 it can be seen that  $C_n$  is increasing about linear with  $\alpha$  for  $\alpha < 40^\circ$  and that  $C_n$  is about constant for  $\alpha > 40^\circ$ . There is hysteresis for the region  $37.9^\circ < \alpha < 40.7^\circ$ . In this region,  $C_n$  suddenly drops at  $\alpha = 40.7^\circ$  if the left curve is followed by increasing  $\alpha$ .  $C_n$  suddenly increases at  $\alpha = 37.9^\circ$  if the right curve is followed by decreasing  $\alpha$ .

In figure 6 it can be seen that the ratio  $i/w$  is slowly increasing at increasing values of  $\alpha$ . The vane blade will normally be used for angles of  $\alpha$  in between about  $10^\circ$  and  $35^\circ$  and the average value of  $i/w$  for this region is about 0.35. The length of the vane arm  $R_v$  from the turning axis up to the nose of the vane blade will be about three times the vane width  $w$ . So the distance  $(R_v + i)$  in between the turning axis and  $N$  is about  $3.35w$ . For this length it is allowed to calculate the vane moment  $M_v$  around the turning axis of the vane for a constant value  $i = 0.35w$  because the variation of  $i$  has only a little influence on the total value of  $(R_v + i)$ .

For the vane moment  $M_v$  it is valid that:

$$M_v = N * (R_v + i) \quad (\text{Nm}) \quad (3)$$

The normal force  $N$  is given by:

$$N = C_n * \frac{1}{2} \rho V^2 * w * h \quad (\text{N}) \quad (4)$$

In this formula  $\rho$  is the density of air (about  $1.2 \text{ kg/m}^3$  at a temperature of  $20 \text{ }^\circ\text{C}$  at sea level) and  $V$  is the wind speed (in  $\text{m/s}$ ) felt by the vane blade.

### 3 The rectangular flat plate for aspect ratios 2 : 1 and 1 : 2

The  $C_n$ - $\alpha$  curves of an aspect ratio of 2 : 1 and of 1 : 2 are given in one graph as figure 31 of report R999D (ref. 4). As no measuring point are available, these curves were copied as accurate as possible in figure 7.

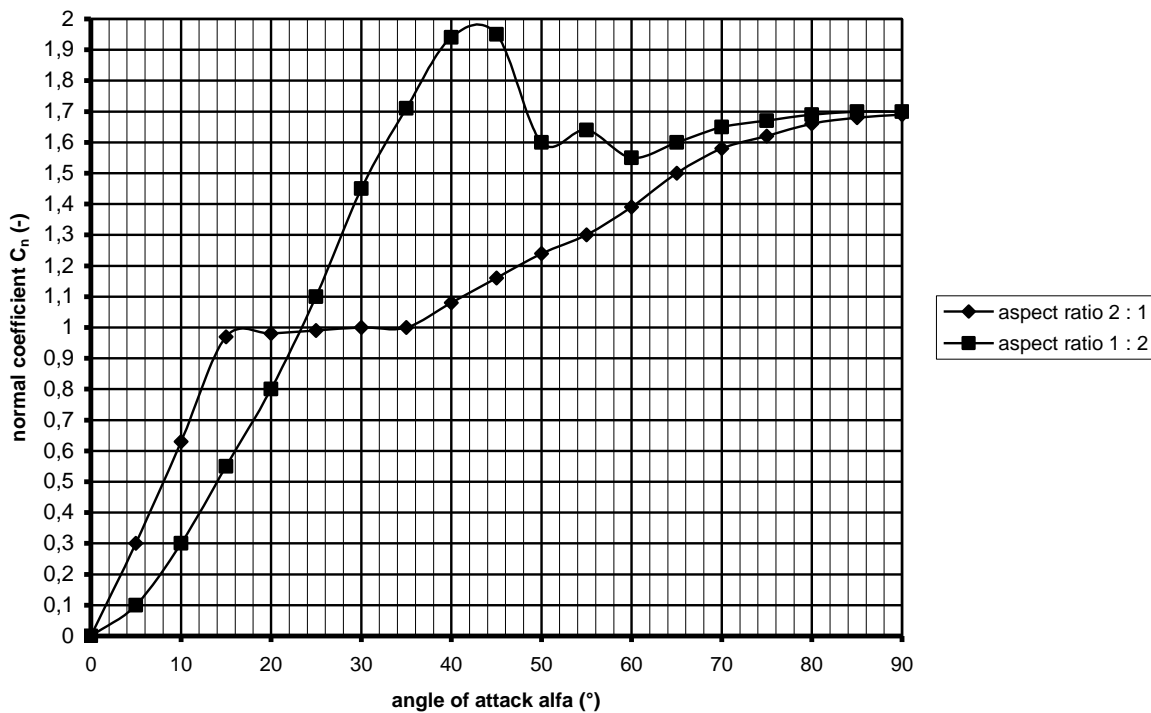


fig. 7  $C_n$ - $\alpha$  curves for rectangular flat plates with aspect ratios 2 : 1 and 1 : 2

In figure 7 it can be seen that there is a large difference in between the  $C_n$ - $\alpha$  curves for aspect ratios 2 : 1 and 1 : 2. The  $C_n$ - $\alpha$  curve for an aspect ratio 2 : 1 has only a rather short linear part up to about  $\alpha = 15^\circ$ , so this aspect ratio is not advised if the vane is used as main vane. But for a side vane this aspect ratio is much better because there is no big peak in the characteristic which will cause turning out of the wind suddenly if the peak is reached. The  $C_n$ - $\alpha$  curve for an aspect ratio of 1 : 2 has a large almost linear part up to about  $\alpha = 42^\circ$  and the maximum  $C_n$  value is very high (almost 2). So a vane blade with an aspect ratio of 1 : 2 is well suited for a main vane.

I have strong indications that the measurements performed in the wind tunnel of Eindhoven are unreliable so one should be careful to use the graphs of figure 7 (see explanation in chapter 5).



#### 4 The rectangular flat plate for aspect ratios 5 : 1 and 1 : 5

The table with measuring points for the rectangular flat plates with aspect ratios 5 : 1 and 1 : 5 are given at page 3-3 of R443D (ref. 1). These tables are copied as table 2. The  $C_n$  values and the ratio  $i/w$  are calculated in the same way as done for the square flat plate and are also added to table 2.

aspect ratio 5 : 1						aspect ratio 1 : 5					
$\alpha$ (°)	$C_l$ (-)	$C_d$ (-)	$C_m$ (-)	$C_n$ (-)	$i/w$ (-)	$\alpha$ (°)	$C_l$ (-)	$C_d$ (-)	$C_m$ (-)	$C_n$ (-)	$i/w$ (-)
0	0	0.0218	0	0	-	0	0	0.0066	0	0	-
4.9	0.377	0.0450	0.092	0.379	0.243	5.0	0.063	0.0112	0.015	0.064	0.234
9.7	0.719	0.135	0.258	0.731	0.353	10.0	0.147	0.0262	0.038	0.149	0.255
14.7	0.774	0.219	0.313	0.804	0.389	14.9	0.300	0.0860	0.105	0.312	0.337
17.6	0.807	0.268	0.330	0.850	0.388	19.8	0.435	0.168	0.154	0.466	0.330
19.7	0.817	0.305	0.340	0.872	0.390	23.8	0.582	0.290	0.217	0.650	0.334
23.8	0.805	0.369	0.361	0.885	0.408	29.7	0.725	0.438	0.282	0.847	0.333
26.7	0.832	0.424	0.378	0.934	0.405	34.7	0.824	0.608	0.335	1.029	0.326
29.7	0.880	0.497	0.415	1.011	0.410	39.7	0.870	0.755	0.374	1.152	0.325
30.7	0.871	0.511	0.412	1.010	0.408	42.2	0.880	0.827	0.402	1.207	0.333
31.7	0.872	0.534	0.405	1.023	0.396	44.7	0.880	0.898	0.425	1.257	0.338
33.2	0.861	0.563	0.418	1.029	0.406	49.7	0.840	1.030	0.476	1.329	0.358
34.7	0.835	0.578	0.418	1.016	0.411	54.7	0.780	1.080	0.506	1.332	0.380
37.7	0.802	0.608	0.421	1.006	0.418	55.7	0.750	1.090	0.513	1.323	0.388
40.7	0.754	0.648	0.409	0.994	0.411	57.2	0.702	1.080	0.519	1.288	0.403
44.7	0.720	0.707	0.426	1.009	0.422	59.8	0.643	1.070	0.526	1.248	0.421
49.8	0.679	0.791	0.452	1.042	0.434	64.8	0.530	1.070	0.543	1.194	0.455
54.8	0.629	0.866	0.472	1.070	0.441	69.8	0.432	1.100	0.549	1.182	0.464
59.8	0.544	0.952	0.468	1.096	0.427	74.9	0.341	1.130	0.557	1.180	0.472
69.8	0.415	1.073	0.528	1.150	0.459	79.9	0.247	1.159	0.564	1.184	0.476
79.9	0.233	1.163	0.558	1.186	0.470	84.9	0.148	1.180	0.577	1.188	0.486
85.0	0.128	1.190	0.565	1.197	0.472	90.0	0	1.200	0.593	1.200	0.494
90.0	0	1.200	0.578	1.200	0.482						

table 2  $C_l$ ,  $C_d$ ,  $C_m$ ,  $C_n$  and  $i/w$  for rectangular flat plates as a function of  $\alpha$  for aspect ratios 5 : 1 and 1 : 5

The measured  $C_l$ - $\alpha$ , the  $C_d$ - $\alpha$  and the  $C_m$ - $\alpha$  curves are given in figure 8, 9 and 10.

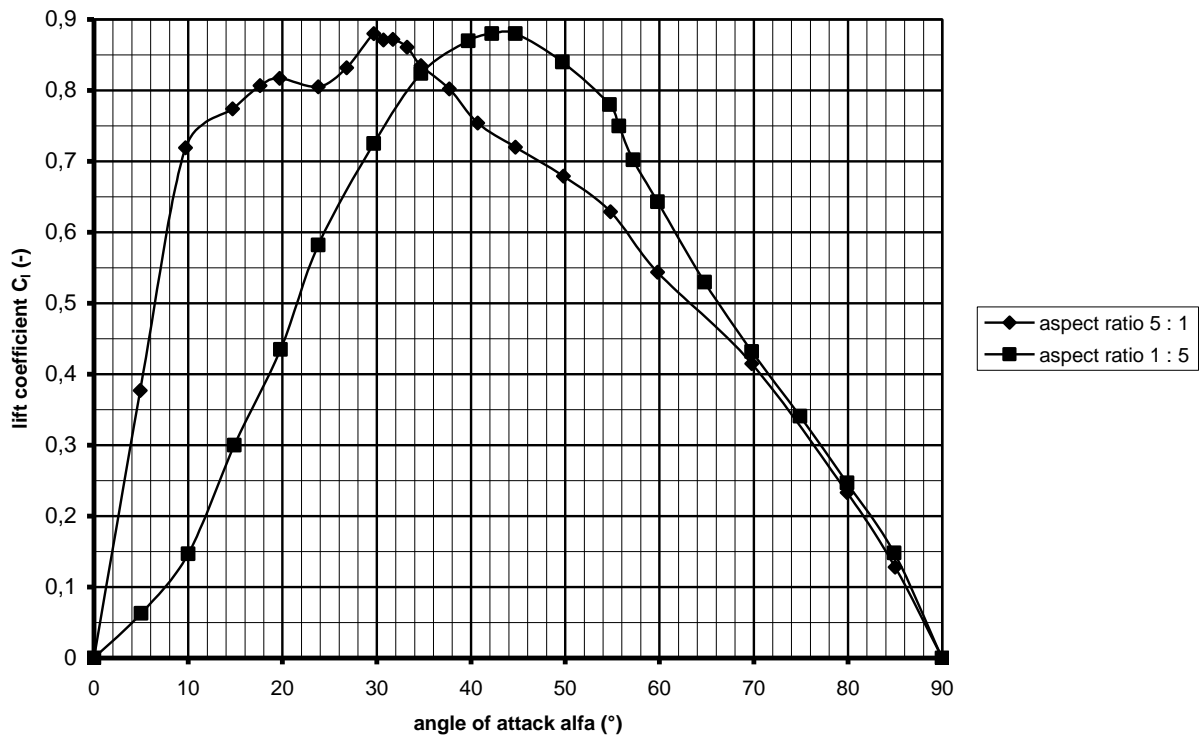


fig. 8 Measured values of  $C_l$  as a function of  $\alpha$  for rectangular flat plates with ratios 5 : 1 and 1 : 5

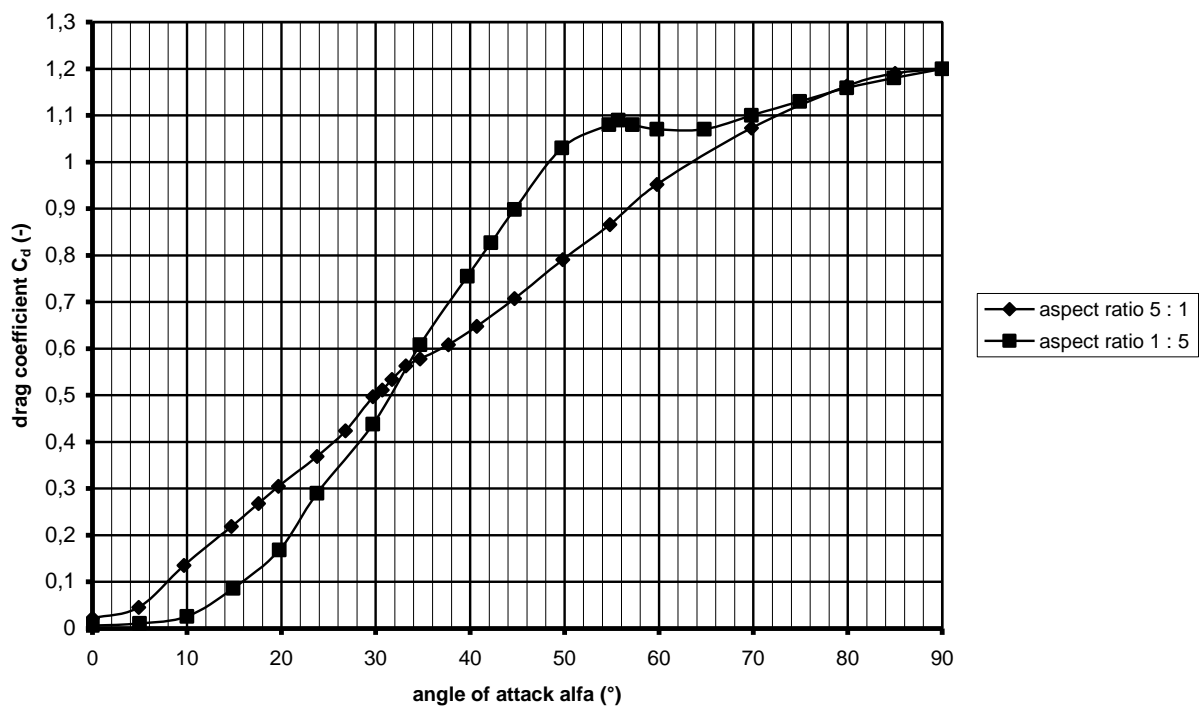


fig. 9 Measured values of  $C_d$  as a function of  $\alpha$  for rectangular flat plates with ratios 5 : 1 and 1 : 5

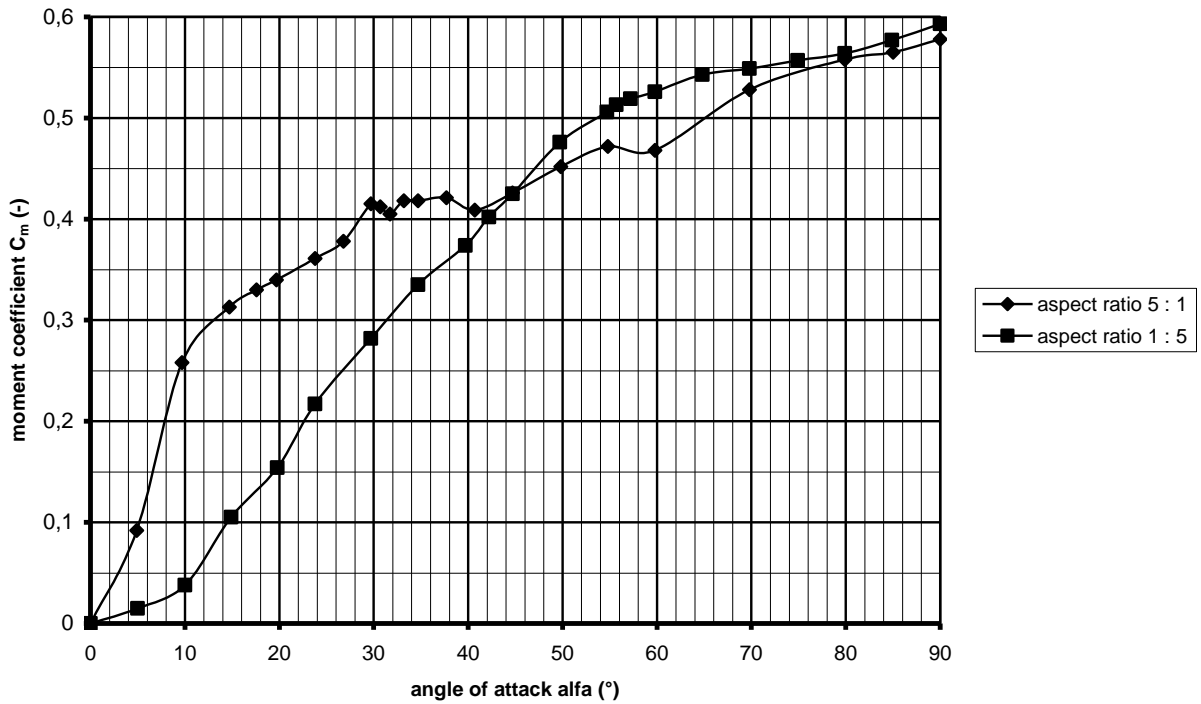


fig. 10 Measured values of  $C_m$  as a function of  $\alpha$  for rectangular flat plates with ratios 5 : 1 and 1 : 5

The calculated values of  $C_n$  as a function of  $\alpha$  are given in the  $C_n$ - $\alpha$  curves of figure 11.

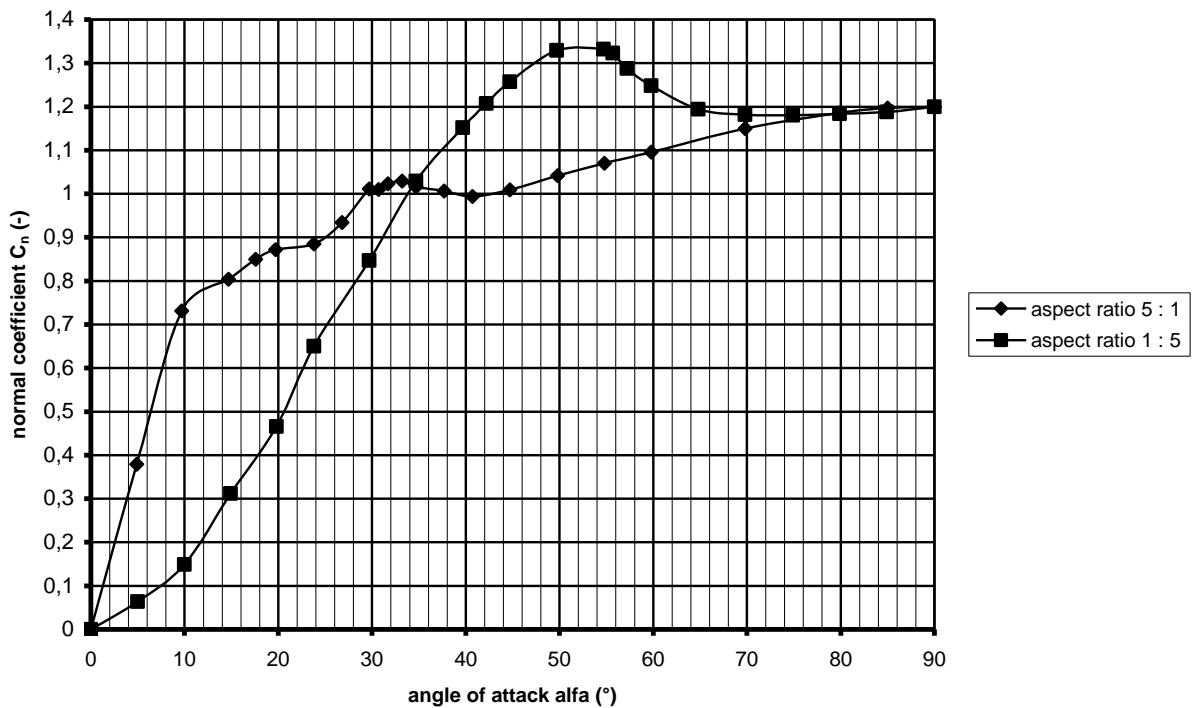


fig. 11 Calculated values of  $C_n$  as a function of  $\alpha$  for rectangular flat plates with ratios 5 : 1 and 1 : 5

The calculated values of  $i/w$  as a function of  $\alpha$  are given in the  $i/w-\alpha$  curves of figure 12.

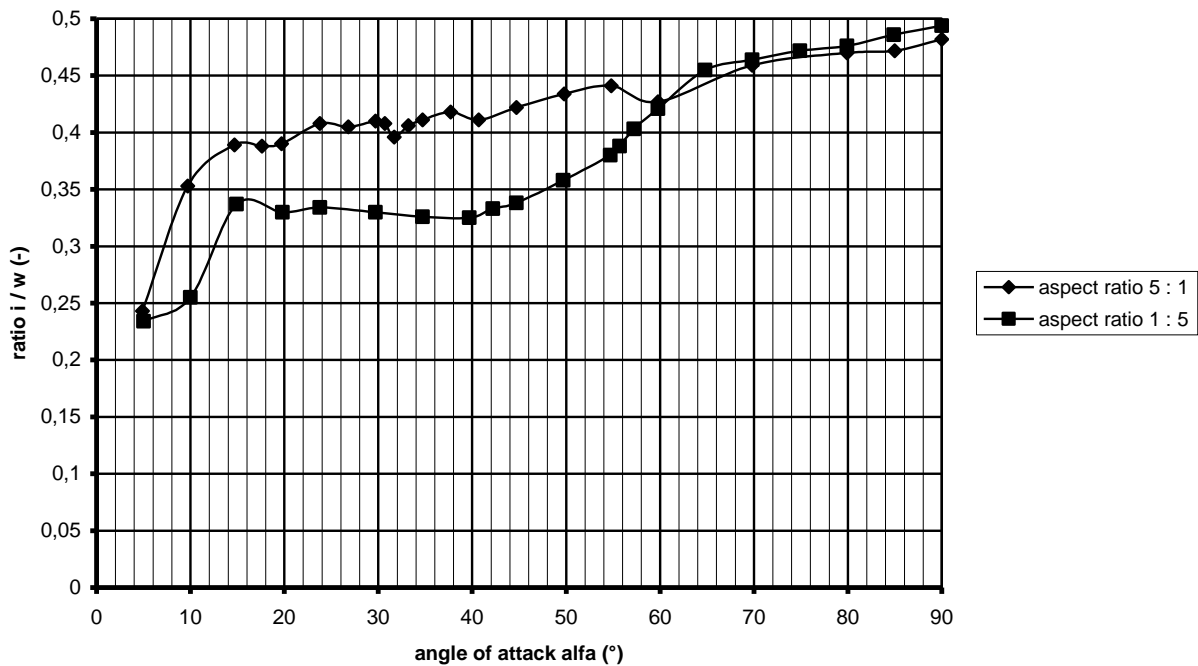


fig. 12 Calculated values of  $i/w$  as a function of  $\alpha$  for rectangular flat plates with ratios 5 : 1 and 1 : 5

Also for aspect ratios 5 : 1 and 1 : 5 there is a large difference in between the characteristics. But the maximum  $C_n$  value for 1 : 5 is much lower than for 1 : 2 and 1 : 1 and the aspect ratios 1 : 2 or 1 : 1 are therefore preferred as main vane.

Another disadvantage of the large aspect ratio 5 : 1 is that a sheet with a certain area and thickness will be less stiffer than a sheet with aspect ratio of 2 : 1 or 1 : 1 with the same area and thickness if the sheet is connected to the vane arm at the middle of the sheet. Therefore it isn't advised to use a rectangular flat plate with aspect ratio 5 : 1 as vane blade.

## 5 Comparing of the measurements

The measurements for the square flat plate and for the rectangular flat plates with aspect ratios 5 : 1 and 1 : 5 have been measured by the same man (Flagsbart) and in the same wind tunnel in Göttingen. This is a very famous wind tunnel and it can be expected that one has taken care to prevent tunnel blockage by the object which was measured. So I believe that these measurements are reliable.

If the values of  $C_n$  are compared for  $\alpha = 90^\circ$  it can be seen that for the square plate,  $C_n = 1.15$  and that for the rectangular flat plate with aspect ratios 5 : 1 and 1 : 5, that  $C_n = 1.2$ , so a little higher. However, for the rectangular flat plate with aspect ratio 2 : 1,  $C_n = 1.69$  and for the aspect ratio 1 : 2,  $C_n = 1.7$ . These values should be the same but the most strange fact is that the values are much larger than for a square plate. I don't believe that this is correct so a did a simple test to check my doubts.

The  $C_n$  value for  $\alpha = 90^\circ$  is the same as the drag coefficient for  $\alpha = 90^\circ$  as no lift will be produced for this angle. So one can compare the drag coefficients for  $\alpha = 90^\circ$ . To do this I made an aerodynamic balance. The balance consist of a beam which can turn around a small vertical tower which has the axis in the centre of the beam. On one side a rectangular flat plate is connected with a width of 100 mm and a height of 200 mm, so with an aspect ratio of 2 and an area of 20000 mm<sup>2</sup>. On the other side a square plate is connected with a height and width of 141.4 mm, so also with an area of 20000 mm<sup>2</sup>. The distance in between the hart of both plates and the centre of the beam is 242 mm for both plates.

The tower is hold in one hand and I was driving on a bicycle against the wind. What happened was that the balance staid perpendicular to the wind. So this means that the drag coefficient of a rectangular flat plate with an aspect ratio 2 : 1 is just the same as that of a square flat plate. I even noticed that the square flat plate wins the game if a small yaw angle is created. This can be understood because the  $C_n$  value for a square plate is almost constant for large angles  $\alpha$  but for a rectangular plate with aspect ratio 2 : 1,  $C_n$  decreases if the angle  $\alpha$  decreases from  $90^\circ$  up to  $35^\circ$ . It is about constant for  $15^\circ < \alpha < 35^\circ$  and it decreases linear for  $0^\circ < \alpha < 15^\circ$  (see figure 7).

This test demonstrates that the values measured in the wind tunnel of the department of Physics the University Technology of Eindhoven are much too high. I was working at the Wind Energy Group of this department at that time and there were other indications that the measured values were too high. It may have the following reason. The wind tunnel has a square measuring section of 0.5 m \* 0.5 m which is rather small. So if one wants to measure an object in a closed measuring section, these object must be very small to prevent tunnel blockage. The measuring section is therefore removed, so one is measuring in an open flow. This allows expansion of the wake around the object. However, this expansion is not as much as for a full open wind tunnel or for a big wind tunnel with a small object, because for the used wind tunnel, the air is sucked in the tunnel opening at the back side of the object.

So this test demonstrates that the  $C_d$  and so the  $C_n$  value for  $\alpha = 90^\circ$  is a factor  $1.69 / 1.15 = 1.47$  too high! This means that the  $C_n$  value for  $\alpha = 90^\circ$  has to be multiplied by a correction factor  $f = 1.15 / 1.69 = 0.680$  to get the correct  $C_n$  value. The tunnel blockage is maximal for the sheet perpendicular to the air flow and zero for  $\alpha = 0^\circ$ . So the part of the  $C_n$ - $\alpha$  curves for small angle  $\alpha$  as given in figure 7 might be about correct. However, this test demonstrates that the measurements executed for the aspect ratios 2 : 1 and 1 : 2 are very unreliable, especially for large angles  $\alpha$ !

## 6 Correction of the measurements for aspect ratios 2 : 1 and 1 : 2 for tunnel blockage

Vane blades with an aspect ratio 2 : 1 or 1 : 2 have acceptable dimensions so it seems a good idea to correct the measurements as given in figure 7 for tunnel blockage. In chapter 5 it was found for aspect ratios 2 : 1 and 1 : 2, that the  $C_n$  value for  $\alpha = 90^\circ$  must be reduced by a factor  $f = 0.680$  to compensate the effect of tunnel blockage. For  $\alpha = 0^\circ$  there is no tunnel blockage, so the reduction factor  $f = 1$  for  $\alpha = 0^\circ$ . The decrease of the reduction factor  $f$  for angles of  $\alpha$  in between  $0^\circ$  and  $90^\circ$  will not be linear. It is assumed that it varies according to the function:

$$f = 0.68 + 0.32 \cos^2 \alpha \quad (-) \quad (5)$$

Substitution of  $\alpha = 0^\circ$  in formula 5 gives  $f = 1$ . Substitution of  $\alpha = 90^\circ$  in formula 5 gives  $f = 0.68$  so the formula is right. The  $C_n$  values are given in figure 7 for every  $5^\circ$ . So next  $f$  is calculated for angles of  $\alpha$  increasing by  $5^\circ$ . The result of the calculation is given in table 3.

$\alpha$ (°)	f (-)
0	1
5	0.998
10	0.990
15	0.979
20	0.963
25	0.943
30	0.920
35	0.895
40	0.868
45	0.840
50	0.812
55	0.785
60	0.760
65	0.737
70	0.717
75	0.701
80	0.690
85	0.682
90	0.680

table 3 Estimated variation of the correction factor f as a function of  $\alpha$

The estimated variation of f as a function of  $\alpha$  is given in figure 13.

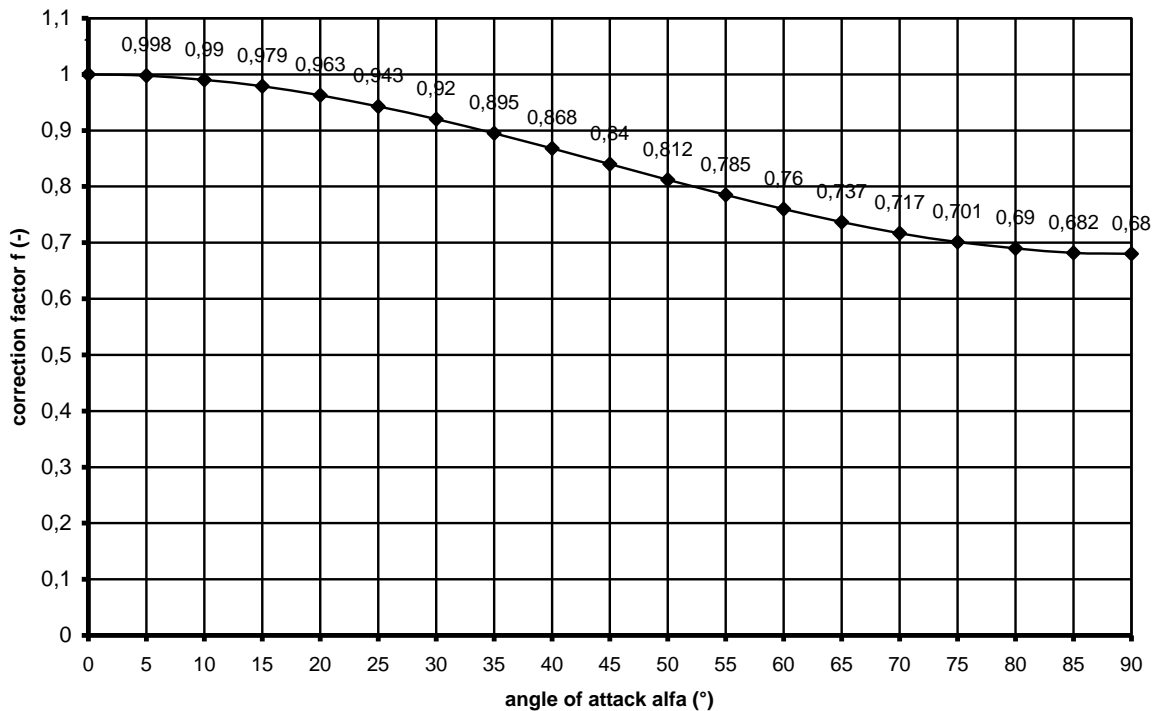


fig 13 Estimated variation of the correction factor f as a function of  $\alpha$

Next figure 7 is copied as figure 14 but the values of  $C_n$  are multiplied by the correction factor f of table 3 or figure 13.

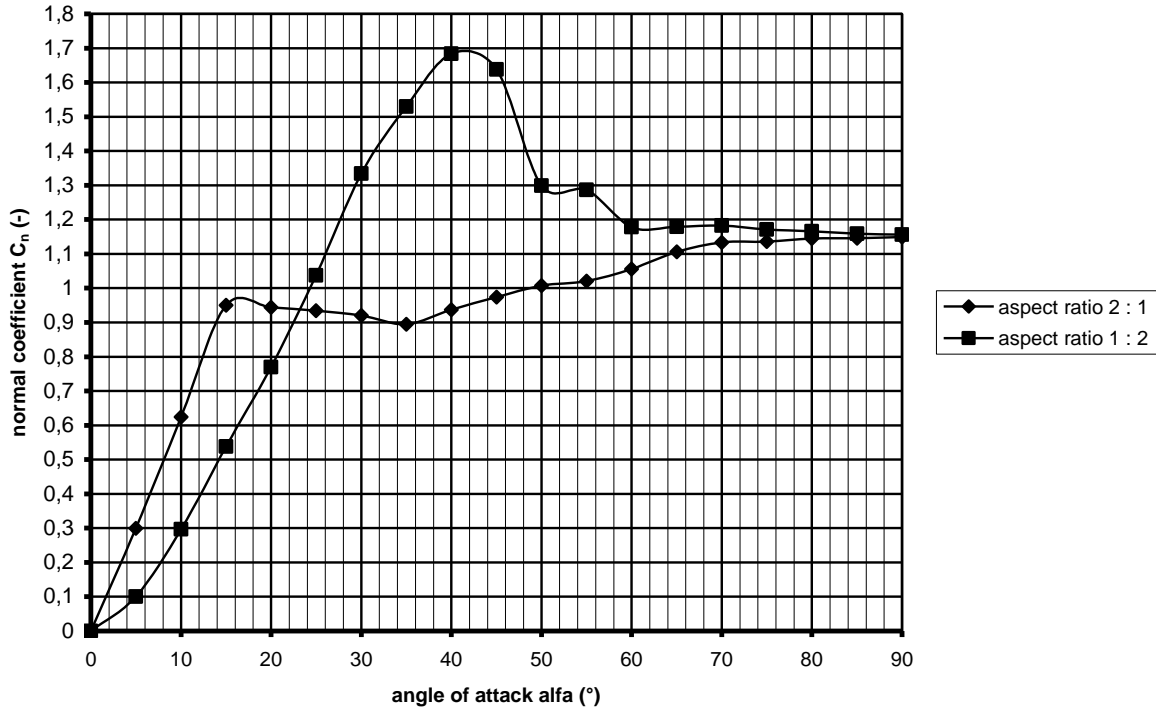


fig. 14  $C_n$ - $\alpha$  curves for rectangular flat plates with aspect ratios 2 : 1 and 1 : 2, corrected for tunnel blockage by a factor  $f$

## 7 Determination of the moment coefficient $C_{mh}$ around a point H for a square plate

The lift  $L$ , the drag  $D$  and the moment  $M$  for a square plate are given around the airfoil nose (see figure 1). So the dimensionless coefficients  $C_l$ ,  $C_d$  and  $C_m$  are also given around the airfoil nose. Most vanes have a relatively small vane blade mounted at the end of a long vane arm. In this case it is easy to replace  $L$ ,  $D$  and  $M$  by the normal force  $N$  acting at a distance  $i$  from the airfoil nose. The ratio  $i/w$  is given in figure 6 for a square plate.

The angle of attack  $\alpha$  in between the wind direction and the vane blade is normally in between about  $10^\circ$  and  $35^\circ$  and in figure 6 it can be seen that  $i/w$  is about 0.35 for this  $\alpha$ -range. So  $i$  is about  $0.35 w$ . If the length of the vane arm is long with respect to  $i$ , it is allowed to take a constant value  $i = 0.35 w$  for calculation of the vane moment around the vane hinge axis.

However, sometimes one wants to use no vane arm and one wants that the vane rotates around a point H which lies behind the airfoil nose. In this case, one has to determine the moment coefficient  $C_{mh}$  around this point H. The distance in between the airfoil nose and point H is called  $p$ . The angle in between the line through the airfoil nose and point H and the zero line of the airfoil is called  $\gamma$  (see figure 15). For a flat plate with a thickness  $t$ , the zero line is equal to the heart line of the plate which lies at a distance of  $\frac{1}{2} t$  from one of the sides. In figure 1 it can be seen that the left hand direction of  $M$  is taken positive. This is also the case for  $M_h$ ,  $C_m$  and  $C_{mh}$ . So a positive aerodynamic moment has a tendency to decrease the angle of attack  $\alpha$ .

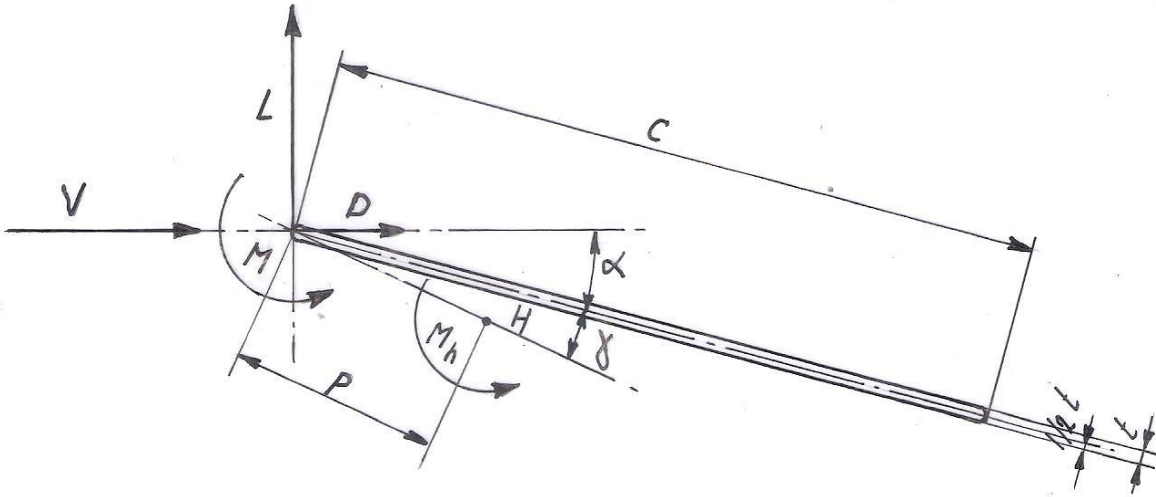


fig. 15 L, D, M and  $M_h$  around point H at a distance  $p$  and an angle  $\gamma$  from the airfoil nose

$C_{mh}$  will now be determined for different positions of H for a square plate. It can be proven that the left hand moment coefficient around point H,  $C_{mh}$  is given by:

$$C_{mh} = C_m - p/c \{C_l \cos(\alpha + \gamma) + C_d \sin(\alpha + \gamma)\} \quad (-) \quad (6)$$

It is assumed that H is lying on the zero line of the airfoil, so  $\gamma = 0^\circ$ . So for this condition formula 6 changes into:

$$C_{mh} = C_m - p/c (C_l \cos\alpha + C_d \sin\alpha) \quad (-) \quad (\text{for } \gamma = 0^\circ) \quad (7)$$

$C_{mh}$  is now determined for four different values of  $p$  being  $p = 0.1 c$ ,  $p = 0.2 c$ ,  $p = 0.3 c$  and  $p = 0.4 c$ . The value of  $C_{mh}$  for  $p = 0.1 c$  is called  $C_{m0.1}$ . So  $C_{m0.1}$  is given by:

$$C_{m0.1} = C_m - 0.1 (C_l \cos\alpha + C_d \sin\alpha) \quad (-) \quad (8)$$

The value of  $C_{mh}$  for  $p = 0.2 c$  is called  $C_{m0.2}$ . So  $C_{m0.2}$  is given by:

$$C_{m0.2} = C_m - 0.2 (C_l \cos\alpha + C_d \sin\alpha) \quad (-) \quad (9)$$

The value of  $C_{mh}$  for  $p = 0.3 c$  is called  $C_{m0.3}$ . So  $C_{m0.3}$  is given by:

$$C_{m0.3} = C_m - 0.3 (C_l \cos\alpha + C_d \sin\alpha) \quad (-) \quad (10)$$

The value of  $C_{mh}$  for  $p = 0.4 c$  is called  $C_{m0.4}$ . So  $C_{m0.4}$  is given by:

$$C_{m0.4} = C_m - 0.4 (C_l \cos\alpha + C_d \sin\alpha) \quad (-) \quad (11)$$

The measured values of  $C_l$ ,  $C_d$  and  $C_m$  and the calculated values for  $(C_l \cos\alpha + C_d \sin\alpha)$  and for  $C_{m0.1}$ ,  $C_{m0.2}$ ,  $C_{m0.3}$  and  $C_{m0.4}$  are given in table 4.



$\alpha$ (°)	$C_l$ (-)	$C_d$ (-)	$C_m$ (-)	$(C_l \cos\alpha + C_d \sin\alpha)$	$C_{m0.1}$ (-)	$C_{m0.2}$ (-)	$C_{m0.3}$ (-)	$C_{m0.4}$ (-)
0	0	0.0232	0	0	0	0	0	0
5.0	0.161	0.0363	0.035	0.1636	0.015	0.002	-0.014	-0.030
9.9	0.361	0.0842	0.098	0.3691	0.061	0.024	-0.013	-0.050
14.9	0.591	0.176	0.193	0.6164	0.131	0.070	0.008	-0.054
19.9	0.831	0.313	0.299	0.8785	0.211	0.123	0.035	-0.052
24.6	1.015	0.479	0.402	1.1223	0.290	0.178	0.065	-0.047
34.7	1.300	0.904	0.606	1.5834	0.448	0.289	0.131	-0.027
37.7	1.330	1.026	0.668	1.6798	0.500	0.332	0.164	-0.004
39.7	1.327	1.100	0.708	1.7236	0.536	0.363	0.191	0.019
40.7	1.323	1.101	0.724	1.7210	0.552	0.380	0.208	0.036
37.9	0.887	0.703	0.478	1.1318	0.365	0.252	0.138	0.025
39.9	0.840	0.709	0.463	1.0992	0.353	0.243	0.133	0.023
40.9	0.832	0.722	0.467	1.1016	0.357	0.247	0.137	0.026
41.9	0.821	0.737	0.480	1.1033	0.370	0.259	0.149	0.039
46.9	0.751	0.799	0.472	1.0965	0.362	0.253	0.143	0.033
54.9	0.655	0.925	0.493	1.1334	0.380	0.266	0.153	0.040
64.4	0.484	1.020	0.505	1.1549	0.390	0.274	0.159	0.043
75.0	0.302	1.085	0.528	1.1262	0.415	0.303	0.190	0.078
90.0	0	1.150	0.566	1.1500	0.451	0.336	0.221	0.106

table 4 Measured values of  $C_l$ ,  $C_d$  and  $C_m$  and calculated values of  $(C_l \cos\alpha + C_d \sin\alpha)$ ,  $C_{m0.1}$  (-),  $C_{m0.2}$  (-),  $C_{m0.3}$  (-) and  $C_{m0.4}$  (-) for a square plate as a function of  $\alpha$

The  $C_m$ - $\alpha$  curve, the  $C_{m0.1}$ - $\alpha$  curve, the  $C_{m0.2}$ - $\alpha$  curve, the  $C_{m0.3}$ - $\alpha$  curve and the  $C_{m0.4}$ - $\alpha$  curve can be derived from table 4. These curves are given in figure 16.

The moment  $M_h$  in Nm for a rectangular vane blade with a width  $w$  and a height  $h$  can be calculated for a certain wind speed  $V$  with:

$$M_h = C_{mh} * \frac{1}{2}\rho V^2 * w^2 * h \quad (\text{Nm}) \quad (12)$$

For a square vane blade,  $w = c$  and  $h = c$ . So formula 12 changes into:

$$M_h = C_{mh} * \frac{1}{2}\rho V^2 * c^3 \quad (\text{Nm}) \quad (\text{for a square vane blade}) \quad (13)$$

The value of  $C_{mh}$  depends on the ratio  $p/c$ . So for every wind speed  $V$ , one can derive a  $M_h$ - $\alpha$  curve which is congruent at a certain scale to the chosen  $C_{mh}$ - $\alpha$  curve. So for instance for  $p/c = 0.2$ , one can derive the  $M_{0.2}$ - $\alpha$  curve using the values of  $C_{m0.2}$  as given in table 4.

The moment which is supplied by a vane blade in winds with varying direction is used to overcome the friction of the vane bearings and to accelerate the vane. It can be assumed that the friction moment of the vane bearings is constant. To supply this friction moment, a larger angle of attack  $\alpha$  is needed for low wind speeds than for high wind speeds. The angle  $\alpha$  will be almost zero for high wind speeds if the wind direction isn't changing.

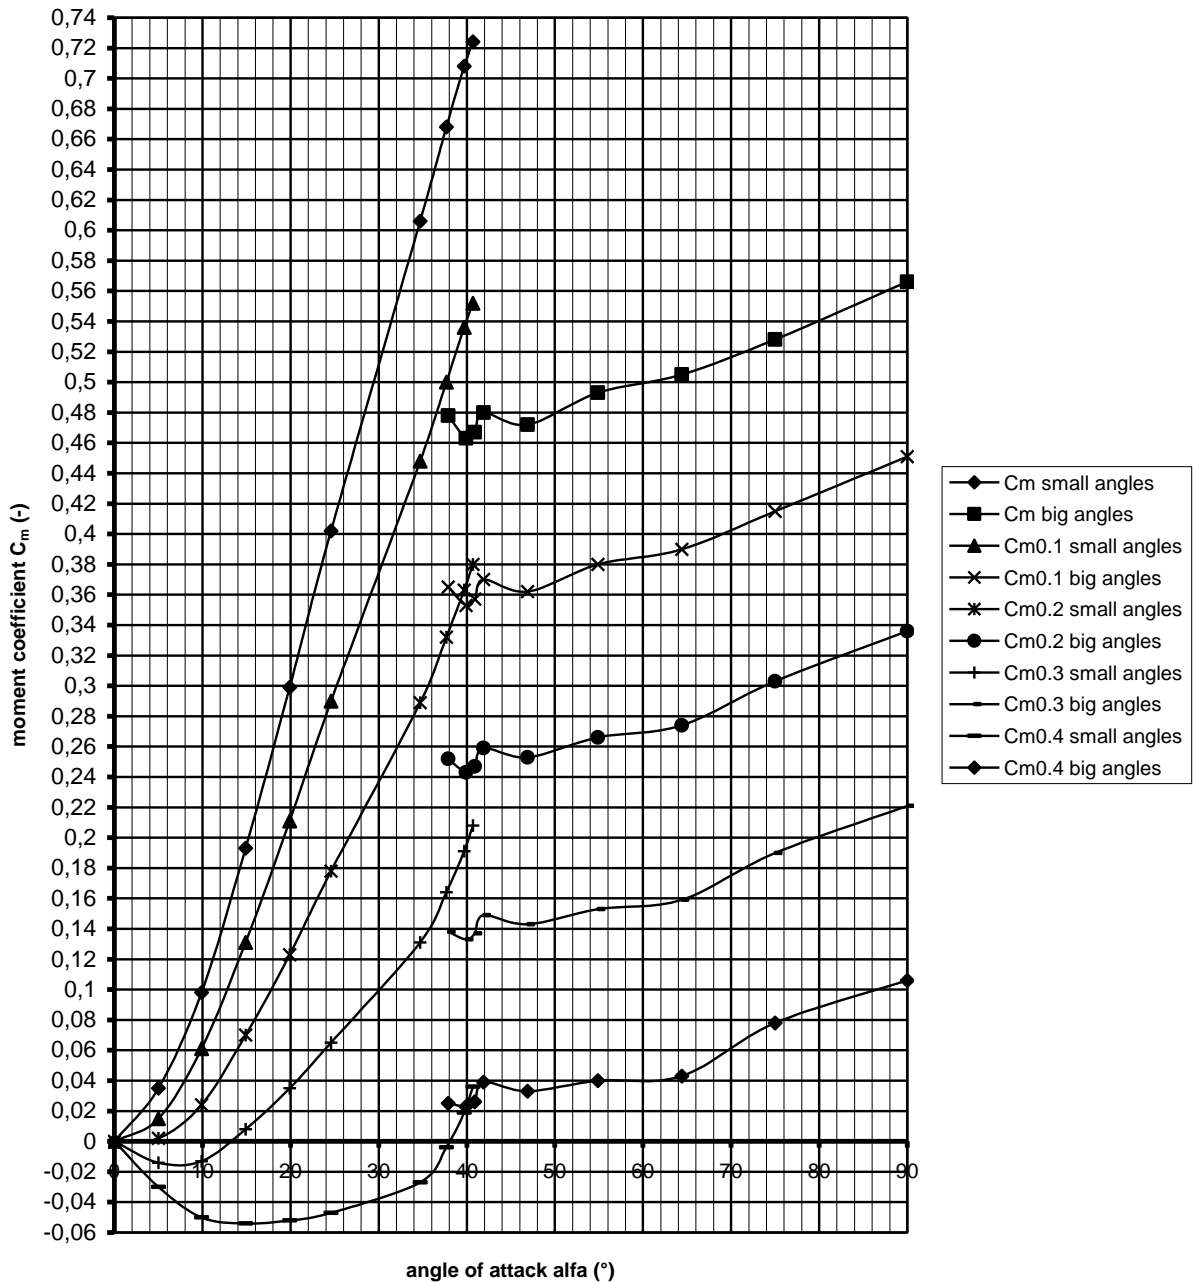


fig. 16 Measured  $C_m$ - $\alpha$  curve, Calculated  $C_{m0.1}$ - $\alpha$  curve,  $C_{m0.2}$ - $\alpha$  curve,  $C_{m0.3}$ - $\alpha$  curve and  $C_{m0.4}$ - $\alpha$  curve for the square flat plate

In figure 16 it can be seen that the  $C_{m0.3}$ - $\alpha$  curve is negative for  $0^\circ < \alpha < 13^\circ$  and that the  $C_{m0.4}$ - $\alpha$  curve is negative for  $0^\circ < \alpha < 38^\circ$ . So a square vane blade which rotates around a shaft which lies at  $p = 0.3 c$  or at  $p = 0.4 c$  is unstable for small angles  $\alpha$  and will turn out of the wind that far until  $C_{mh}$  is becoming positive. So only the vane positions for  $p = 0.1 c$  and  $p = 0.2 c$  can be used in practice!

Figure 16 is valid for a square vane blade. No  $C_m$  values are available for rectangular flat plates with an aspect ratio  $2 : 1$  or  $1 : 2$  but I expect that the  $C_{mh}$ - $\alpha$  curves will also become negative for small angles  $\alpha$  if  $p$  is chosen larger than about  $0.2 c$ .

## 8 Determination of the moment coefficient $C_{mh}$ around a point H for an aspect ratio 1 : 5

The same procedure as used for a square flat plate will now be followed for a rectangular flat plate with an aspect ratio of 1 : 5. Formulas 6 up to 11 are also valid but for  $C_l$ ,  $C_d$  and  $C_m$ , the values for an aspect ratio of 1 : 5 have to be used. These values are copied from table 2 and given in table 5. The difference with a square flat plate is that there is no area for which there is hysteresis in the curves. The calculated values of  $(C_l \cos\alpha + C_d \sin\alpha)$ ,  $C_{m0.1}$ ,  $C_{m0.2}$ ,  $C_{m0.3}$  and  $C_{m0.4}$  are also given in table 5.

$\alpha$ (°)	$C_l$ (-)	$C_d$ (-)	$C_m$ (-)	$(C_l \cos\alpha + C_d \sin\alpha)$	$C_{m0.1}$ (-)	$C_{m0.2}$ (-)	$C_{m0.3}$ (-)	$C_{m0.4}$ (-)
0	0	0.0066	0	0	0	0	0	0
5.0	0.063	0.0112	0.015	0.0637	0.009	0.002	-0.004	-0.010
10.0	0.147	0.0262	0.038	0.1493	0.023	0.008	-0.007	-0.022
14.9	0.300	0.0860	0.105	0.3120	0.074	0.043	0.011	-0.020
19.8	0.435	0.168	0.154	0.4662	0.107	0.061	0.014	-0.032
23.8	0.582	0.290	0.217	0.6495	0.152	0.087	0.022	-0.043
29.7	0.725	0.438	0.282	0.8468	0.197	0.113	0.028	-0.057
34.7	0.824	0.608	0.335	1.0236	0.233	0.130	0.028	-0.074
39.7	0.870	0.755	0.374	1.1516	0.259	0.144	0.029	-0.087
42.2	0.880	0.827	0.402	1.2074	0.281	0.161	0.040	-0.081
44.7	0.880	0.898	0.425	1.2572	0.299	0.174	0.048	-0.078
49.7	0.840	1.030	0.476	1.3289	0.343	0.210	0.077	-0.056
54.7	0.780	1.080	0.506	1.3322	0.373	0.240	0.106	-0.027
55.7	0.750	1.090	0.513	1.3231	0.381	0.248	0.116	-0.016
57.2	0.702	1.080	0.519	1.2881	0.390	0.261	0.133	0.004
59.8	0.643	1.070	0.526	1.2482	0.401	0.276	0.152	0.027
64.8	0.530	1.070	0.543	1.1938	0.424	0.304	0.185	0.065
69.8	0.432	1.100	0.549	1.1815	0.431	0.313	0.195	0.076
74.9	0.341	1.130	0.557	1.1798	0.439	0.321	0.203	0.085
79.9	0.247	1.159	0.564	1.1844	0.446	0.327	0.209	0.090
84.9	0.148	1.180	0.577	1.1885	0.458	0.339	0.220	0.102
90.0	0	1.200	0.593	1.2000	0.473	0.353	0.233	0.113

table 5 Measured values of  $C_l$ ,  $C_d$  and  $C_m$  and calculated values of  $(C_l \cos\alpha + C_d \sin\alpha)$ ,  $C_{m0.1}$  (-),  $C_{m0.2}$  (-),  $C_{m0.3}$  (-) and  $C_{m0.4}$  (-) for an aspect ratio of 1 : 5 as a function of  $\alpha$

The  $C_m$ - $\alpha$  curve, the  $C_{m0.1}$ - $\alpha$  curve, the  $C_{m0.2}$ - $\alpha$  curve, the  $C_{m0.3}$ - $\alpha$  curve and the  $C_{m0.4}$ - $\alpha$  curve can be derived from table 5. These curves are given in figure 17.

The moment  $M_h$  in Nm for a rectangular vane blade with a width  $w$  and a height  $h$  is given by formula 12. For a rectangular flat plate with an aspect ratio of 1 : 5,  $w = c$  and  $h = 0.2 c$ . So formula 12 changes into:

$$M_h = 0.2 * C_{mh} * \frac{1}{2}\rho V^2 * c^3 \quad (\text{Nm}) \quad (\text{for an aspect ratio 1 : 5}) \quad (14)$$

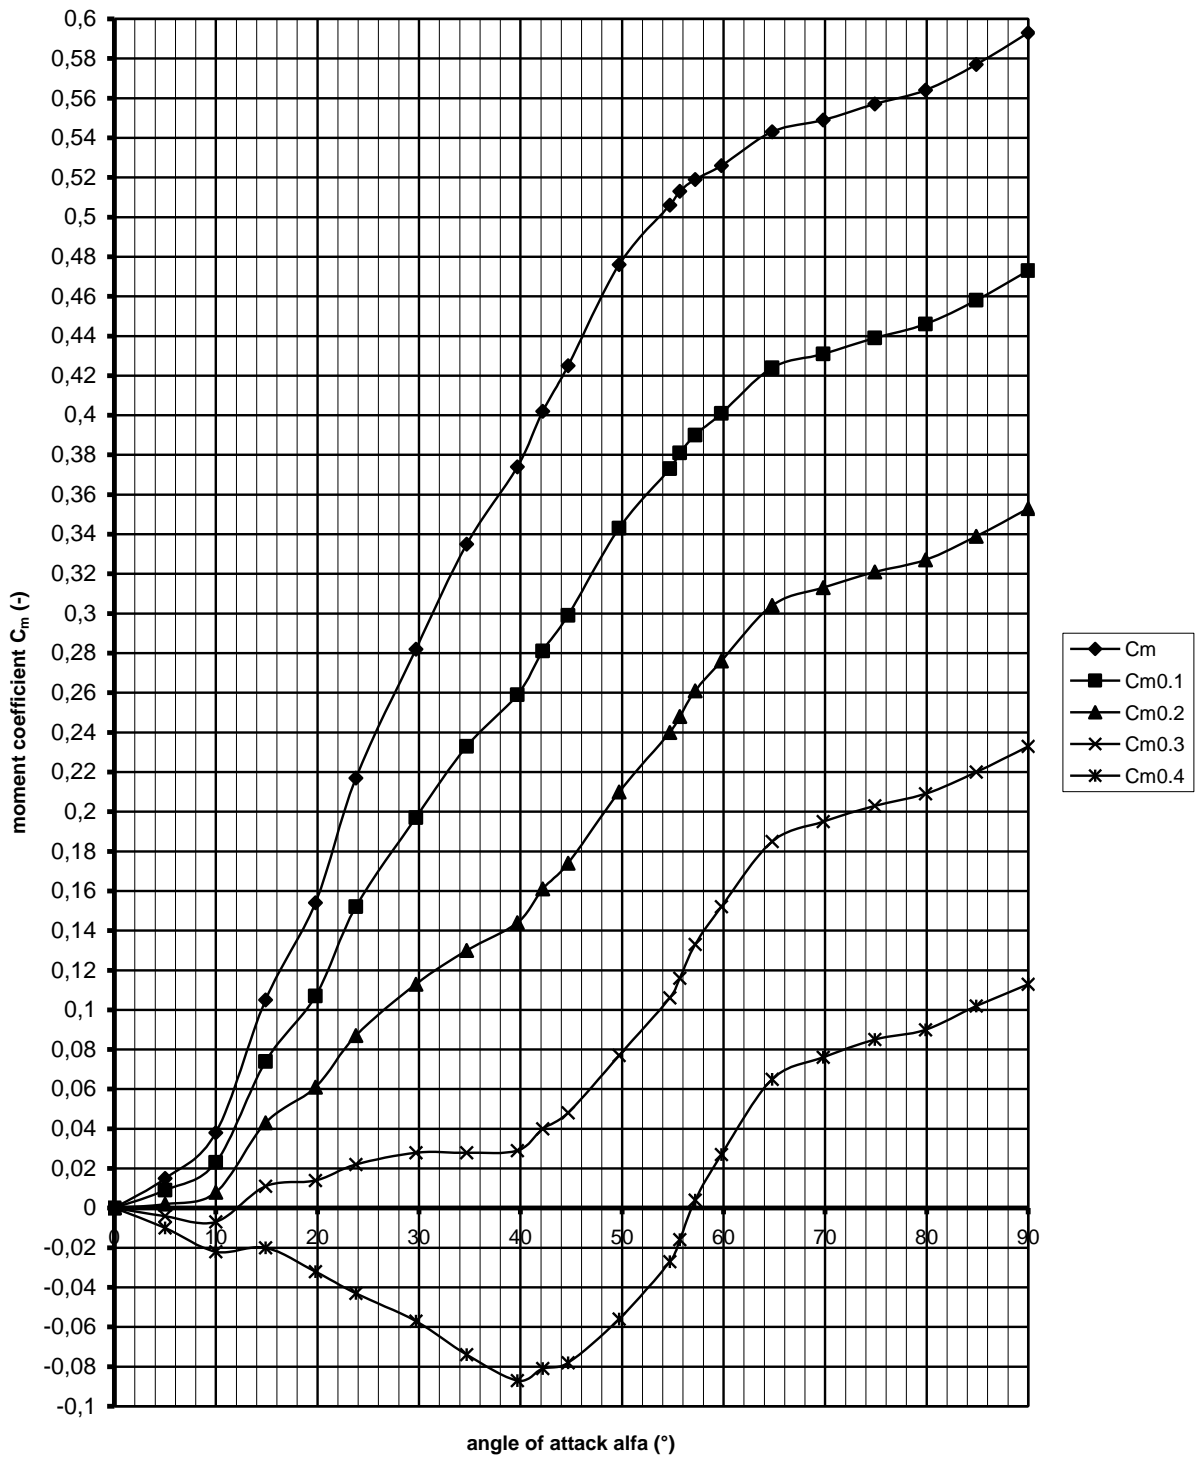


fig. 17 Measured  $C_m$ - $\alpha$  curve, Calculated  $C_{m0.1}$ - $\alpha$  curve,  $C_{m0.2}$ - $\alpha$  curve,  $C_{m0.3}$ - $\alpha$  curve and  $C_{m0.4}$ - $\alpha$  curve for a rectangular flat plate with an aspect ratio of 1 : 5

In figure 17 it can be seen that the  $C_{m0.3}$ - $\alpha$  curve is negative for  $0^\circ < \alpha < 12^\circ$  and that the  $C_{m0.4}$ - $\alpha$  curve is negative for  $0^\circ < \alpha < 57^\circ$ . So a rectangular flat plate with an aspect ratio of 1 : 5 which rotates around a shaft which lies at  $p = 0.3 c$  or at  $p = 0.4 c$  is instable for small angles  $\alpha$  and will turn out of the wind that far until  $C_{mh}$  is becoming positive. So only the vane positions for  $p = 0.1 c$  and  $p = 0.2 c$  can be used in practice!

## 9 References

- 1 Hageman A. Catalogue of Aerodynamic Characteristics of Airfoils in the Reynolds number range  $10^4 - 10^6$ , July 1980, Report R443D (no longer available), Laboratory of Fluid Dynamics and Heat Transfer, Department of Physics, University of Technology Eindhoven. A scan of this report can be found on my website at the bottom of the list with KD-reports.
- 2 Kragten A. Safety systems for small wind turbines which turn the rotor out of the wind at high wind speeds, February 2012, reviewed May 2016, free public report KD 485, engineering office Kragten Design, Populierenlaan 51, 5492 SG Sint-Oedenrode.
- 3 Kragten A. Rotor design and matching for horizontal axis wind turbines, January 1999, reviewed February 2017, free public rapport KD 35, Also available in Dutch, engineering office Kragten Design, Populierenlaan 51, 5492 SG Sint-Oedenrode, The Netherlands.
- 4 Kragten A. Safety systems for water pumping windmills, April 1989, report R999D (no longer available), Laboratory of Fluid Dynamics and Heat Transfer, Department of Physics, University of Technology Eindhoven.
- 5 Flachsbart O. Messungen an ebenen und gewölbten platten (in German), edited Prandtl L., Betz A., Ergebnisse der Aerodynamischen Versuchsanstalt zu Göttingen 4, Verlag Odenbourg, R. Munchen.
- 6 Vermeer N. J. Het meten met een twee-komponenten balans aan schaalmodellen in de windtunnel (in Dutch), April 1981, report R487S (no longer available), Laboratory of Fluid Dynamics and Heat Transfer, Department of Physics, University of Technology Eindhoven.