

Development of a pendulum safety system with a torsion spring and $e = 0.2 R$

ing. A. Kragten

March 2010
reviewed December 2024

KD 439

It is allowed to copy this report for private use.

engineering office Kragten Design
Populierenlaan 51
5492 SG Sint-Oedenrode
The Netherlands
telephone: +31 413 475770
e-mail: info@kdwindturbines.nl
website: www.kdwindturbines.nl

Contains		page
1	Introduction	3
2	The ideal δ -V curve	4
3	Description of the pendulum safety system with a torsion spring and a rotor with a Gö 623 airfoil	5
4	Following variations of the wind direction	13
5	Ideas about the torsion spring	14
6	Use of the VIRYA-10 rotor and generator	15
7	Turning the rotor to the helicopter position	17
8	References	18

1 Introduction

Windmills with fixed rotors can be protected against too high forces and too high rotational speeds by turning the rotor out of the wind. This can be done around a vertical and around a horizontal axis. All present VIRYA windmills developed by Kragten Design turn out of the wind around a vertical axis and make use of the so called hinged side vane safety system.

Safety systems for which the rotor is turned out of the wind are described in report KD 485 (ref. 1). Water pumping windmills normally have fixed rotors and all safety systems are working by turning the rotor out of the wind. However, electricity generating windmills can also be protected by turning the rotor out of the wind. In chapter 1 of KD 485, the reasons are given why a safety system is necessary. These reasons are:

- 1 Limitation of the axial force or thrust on the rotor to limit the load on the rotor blades, the tower and the foundation.
- 2 Limitation of the rotational speed of the rotor to limit the centrifugal force in the blades, imbalance forces, high gyroscopic moments in the blades and the rotor shaft, to prevent flutter for blades with low torsion stiffness and to prevent too high rotational speeds of the load which is relevant for limitation of heat dissipation in a generator or for limitation of shock forces in the transmission to a piston pump.
- 3 Limitation of the yawing speed to limit high gyroscopic moments in the blades and the rotor shaft.

The three most generally used systems, the ecliptic system, the inclined hinge main vane system and the hinged side vane system, are described in general in KD 484. Detailed descriptions are available in several separate KD-reports. The hinged side vane system is described in report KD 213 (ref. 2) for the VIRYA-4.2 windmill. The ecliptic system with a torsion spring is described in report KD 409 (ref. 3). The inclined hinge main vane system is described in report KD 431 (ref. 4).

A safety system for which the rotor turns out of the wind around a horizontal axis is described in report KD 377 "Development of a tornado proof pendulum safety system for a medium size wind turbine which turns the rotor out of the wind along a horizontal axis" (ref. 5). The hinge axis for this system is positioned in the rotor plane and at a distance of about $1.1 R$ from the rotor axis. The counterbalancing moment is provided by two heavy weights which are positioned on long arms which move along the tower pipe.

Any safety system has certain advantages and certain disadvantages. The main disadvantage of the pendulum system which is described in report KD 377, is that the total weight of rotor, generator and safety system is rather large. In chapter 6 of KD 377 some alternatives are given. One of the alternatives to reduce the weight, is to position the hinge axis behind the rotor plane and to reduce the eccentricity in between the hinge axis and the rotor axis. However, this alternative has as disadvantage that now the system must have a stop, otherwise the rotor will touch the tower pipe at low wind speeds. The stop must be elastic or the movement of the rotor must be damped, otherwise large shock forces will occur if the stop is hit. But reduction of the total weight is important and the system might be more attractive than the original pendulum safety system with very large eccentricity. Another way to reduce the weight is to use a torsion spring in stead of balancing weights. The use of a torsion spring has also as advantage that the ideal δ -V curve (see chapter 2) can be approached rather close. A system with a torsion spring is described in report KD 438 (ref. 6). For this system the eccentricity e has been taken rather large ($e = 0.4 R$) and then it is allowed to neglect the influence of the self orientating moment M_{so} on the rotor moment M_{rotor} . However, for this large eccentricity the whole construction looks rather ugly and a strong torsion spring is required. So the system is now investigated for a smaller eccentricity $e = 0.2 R$ in this report KD 439. But for this smaller eccentricity the self orientating moment can no longer be neglected. The system is described in chapter 3.

2 The ideal δ -V curve

Generally it is wanted that the windmill rotor is perpendicular to the wind up to the rated wind speed V_{rated} , and that the rotor turns out of the wind such that the rotational speed, the rotor thrust, the torque and the power stay constant above V_{rated} . It appears to be that the component of the wind speed perpendicular to the rotor plane determines these four quantities. The yaw angle δ is the angle in between the wind direction and the rotor axis. The component of the wind speed perpendicular to the rotor plane is therefore $V \cos\delta$. The formulas for a yawing rotor for the rotational speed n_δ , the rotor thrust $F_{t\delta}$, the torque Q_δ and the power P_δ are given in chapter 7 of report KD 35 (ref. 7). These formulas are copied as formula 1, 2, 3 and 4.

$$n_\delta = 30 * \lambda * \cos\delta * V / \pi R \quad (\text{rpm}) \quad (1)$$

$$F_{t\delta} = C_t * \cos^2\delta * \frac{1}{2}\rho V^2 * \pi R^2 \quad (\text{N}) \quad (2)$$

$$Q_\delta = C_q * \cos^2\delta * \frac{1}{2}\rho V^2 * \pi R^3 \quad (\text{Nm}) \quad (3)$$

$$P_\delta = C_p * \cos^3\delta * \frac{1}{2}\rho V^3 * \pi R^2 \quad (\text{W}) \quad (4)$$

These four quantities stay constant above V_{rated} if the component of the wind speed perpendicular to the rotor plane is kept constant above V_{rated} . So in formula:

$$V \cos\delta = V_{\text{rated}} \quad (\text{for } V > V_{\text{rated}}) \quad (5)$$

It is assumed that the rotor is loaded such that it runs at the design tip speed ratio λ_d . If the wind speed is in between 0 m/s and V_{rated} , the n-V curve is a straight line through the origin. The F_t -n and the Q-n curves are then parabolic lines and the P-n curve is a cubic line.

Formula 5 can be written as:

$$\delta = \arccos(V_{\text{rated}} / V) \quad (^\circ) \quad (6)$$

This formula is given as a graph in figure 1 for different value of V / V_{rated} . The value of δ has been calculated for V / V_{rated} is respectively 1, 1.01, 1.05, 1.1, 1.25, 1.5, 2, 2.5, 3, 4, 5 and 6.

The rated wind speed V_{rated} is chosen on the basis of the maximum thrust and the maximum rotational speed which is allowed for a certain rotor and a certain generator. Mostly V_{rated} is chosen about 10 m/s. For the chosen value of V_{rated} , figure 1 can be transformed into the δ -V curve for which V (in m/s) is given on the x-axis. If it is chosen that $V_{\text{rated}} = 10$ m/s, figure 1 becomes the δ -V curve if all values on the x-axis are multiplied by a factor 10.

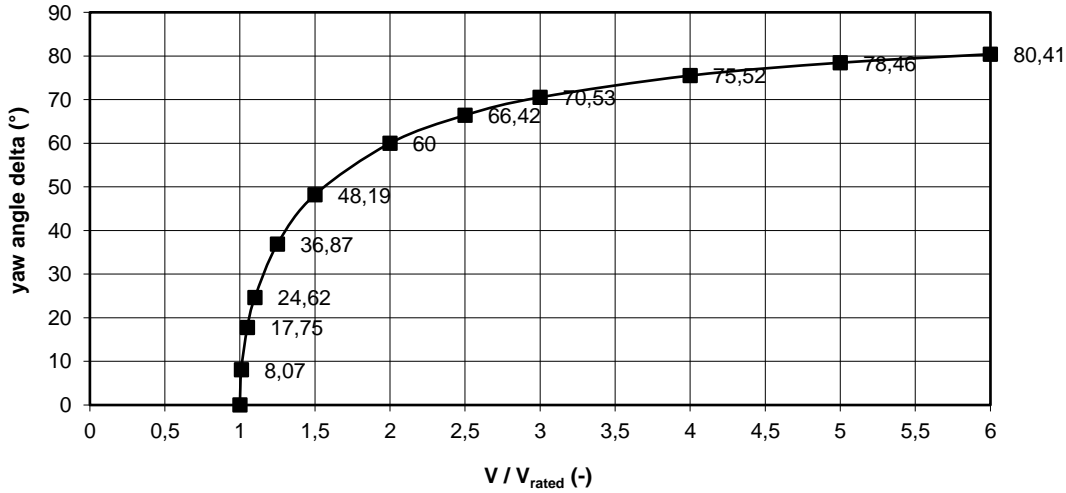


fig. 1 the δ - V/V_{rated} curve for the ideal safety system

In figure 1 it can be seen that the rotor is perpendicular to the wind for $(V / V_{rated}) < 1$ but that the required change in δ is very sudden if V / V_{rated} is a very little higher than 1. So even if one would have a safety system which theoretically has the ideal δ - V curve, in practice this curve will not be followed because the inertia of the system prevents sudden changes of δ around $V / V_{rated} = 1$. So the system will turn out of the wind less than according to the ideal δ - V curve. This will result in a certain overshoot of the rotational speed and the thrust. However, the overshoot of the rotational speed is also determined by the moment of inertia of the rotor. Dynamic description of the system is therefore very complicated.

For high values of V / V_{rated} , a certain increase of V , and therefore a certain increase of V / V_{rated} , requires only a relatively small increase of δ . It is therefore much easier to follow the theoretical δ - V curve at high wind speeds.

3 Description of the pendulum safety system with a torsion spring and a rotor with a Gö 623 airfoil

The safety system is called the pendulum safety system because the whole assembly of rotor, generator and beam is swinging on top of the tower like the pendulum of a clock. The horizontal hinge axis is intersecting with the tower axis. For the eccentricity e in between the rotor axis and the hinge axis is chosen that $e = 0.2 R$. This is rather small if compared to the original pendulum safety system as described in report KD 377 but the same as for the VIRYA-4.2 which is equipped with the hinged side vane system. For $e = 0.2 R$ it is no longer allowed to neglect the contribution of the self orientating moment M_{so} to the rotor moment M_{rotor} . However, it is assumed that the contribution of the side force on the rotor $F_{s\delta}$ can be neglected. So it is assumed that M_{rotor} is only determined by the rotor thrust $F_{t\delta}$ and the eccentricity e and by M_{so} . M_{rotor} is given by:

$$M_{rotor} = F_{t\delta} * e - M_{so} \quad (Nm) \quad (7)$$

In KD 35 no formula is given for the self orientating moment M_{so} . M_{so} is created because the exertion point of the thrust doesn't coincide with the hart of the rotor. There is only little known about M_{so} and only some very rough measurements have been performed which are given in report R 344 D (in Dutch, ref. 8). For these measurement an unloaded two bladed rotor was used with a design tip speed ratio of 5 and provided with a curved sheet airfoil.

Practical experience with the VIRYA windmills using a Gö 623 airfoil, indicate that M_{so} is much lower for this airfoil. Recently I have made a model of a two bladed rotor with a diameter of 0.8 m with a design tip speed ratio of about 6.5 and using a Gö 623 airfoil. The maximum eccentricity which was possible for which the rotor doesn't turn out of the wind completely, was about 0.027 m. From this measurement it is derived that the maximum self orientating moment for a certain wind speed is about half the value as for the same diameter rotor with a curved sheet airfoil.

M_{so} is given by:

$$M_{so} = C_{so} * \frac{1}{2}\rho V^2 * \pi R^3 \quad (\text{Nm}) \quad (8)$$

C_{so} depends on the yaw angle δ and appears to have a maximum for $\delta = 30^\circ$. The estimated C_{so} - δ curve for a rotor with a Gö airfoil with a flat lower side can be approximated by two goniometrical functions, one function for $0^\circ < \delta < 40^\circ$ and one function for $40^\circ < \delta < 90^\circ$. These functions are:

$$C_{so} = 0.0225 \sin 3\delta \quad (-) \quad (\text{for } 0^\circ < \delta < 40^\circ) \quad (9)$$

$$C_{so} = 0.0332 \cos^2\delta \quad (-) \quad (\text{for } 40^\circ < \delta < 90^\circ) \quad (10)$$

If the direction of the moment for a negative value of δ is taken the same as for a positive value of δ , formula 9 can also be used for $-40^\circ < \delta < 0^\circ$. The path of both curves is given in figure 2.

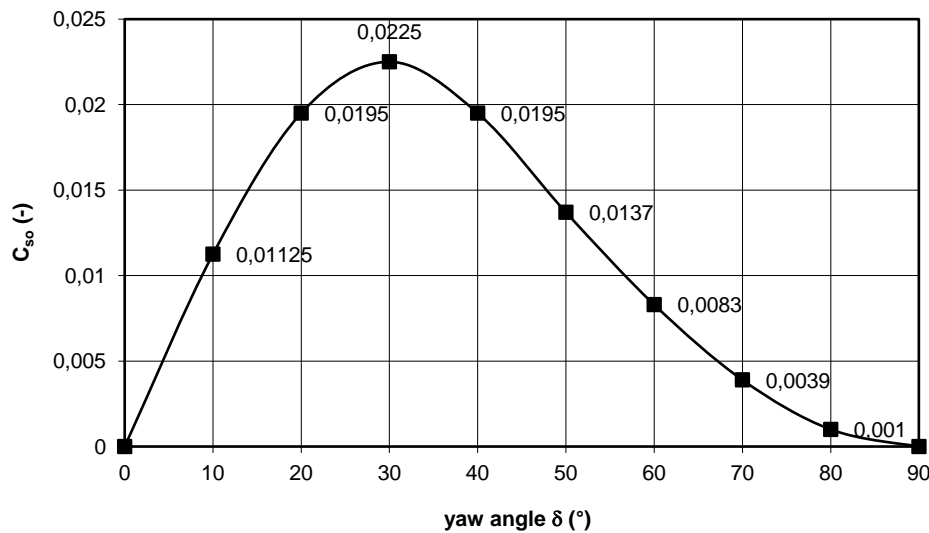


fig. 2 Path of C_{so} as a function of the yaw angle δ

(8) + (9) gives:

$$M_{so} = 0.0225 \sin 3\delta * \frac{1}{2}\rho V^2 * \pi R^3 \quad (\text{Nm}) \quad (\text{for } 0^\circ < \delta < 40^\circ) \quad (11)$$

(8) + (10) gives:

$$M_{so} = 0.0332 \cos^2\delta * \frac{1}{2}\rho V^2 * \pi R^3 \quad (\text{Nm}) \quad (\text{for } 40^\circ < \delta < 90^\circ) \quad (12)$$

(2) + (7) + (11) and $e = 0.2 R$ gives:

$$\begin{aligned} M_{\text{rotor}} &= 0.2 * C_t * \cos^2\delta * \frac{1}{2}\rho V^2 * \pi R^3 - 0.0225 \sin 3\delta * \frac{1}{2}\rho V^2 * \pi R^3 \quad \text{or} \\ M_{\text{rotor}} &= \frac{1}{2}\rho V^2 * \pi R^3 (0.2 * C_t * \cos^2\delta - 0.0225 \sin 3\delta) \quad (\text{Nm}) \\ &(\text{for } 0^\circ < \delta < 40^\circ) \quad (\text{Nm}) \end{aligned} \quad (13)$$

(2) + (7) + (12) and $e = 0.2 R$ gives:

$$\begin{aligned} M_{\text{rotor}} &= 0.2 * C_t * \cos^2\delta * \frac{1}{2}\rho V^2 * \pi R^3 - 0.0332 \cos^2\delta * \frac{1}{2}\rho V^2 * \pi R^3 \quad \text{or} \\ M_{\text{rotor}} &= \frac{1}{2}\rho V^2 * \pi R^3 * \cos^2\delta (0.2 * C_t - 0.0332) \quad (\text{Nm}) \\ &(\text{for } 40^\circ < \delta < 90^\circ) \quad (\text{Nm}) \end{aligned} \quad (14)$$

Apart from the aerodynamic moment M_{rotor} , there is also a moment working around the hinge axis which is caused by the weight of the rotor, the generator and the swinging parts of the head. All these parts together result in a total weight of the swinging parts G (in N), acting at the centre of gravity which is lying at a certain radius R_G from the hinge axis. The position of the centre of gravity is lying a bit below the rotor axis because of the beam which connects the generator to the horizontal axis bearing housing. The head geometry is chosen such that angle α_0 in between r_G and the rotor plane is 30° . The right hand angle in between r_G and the vertical plane is called α . The right hand angle in between the rotor plane and the vertical plane is called δ (see figure 3). Figure 3 is drawn for a yaw angle $\delta = 50^\circ$ belonging to a wind speed $V = 13.17$ m/s (see table 1).

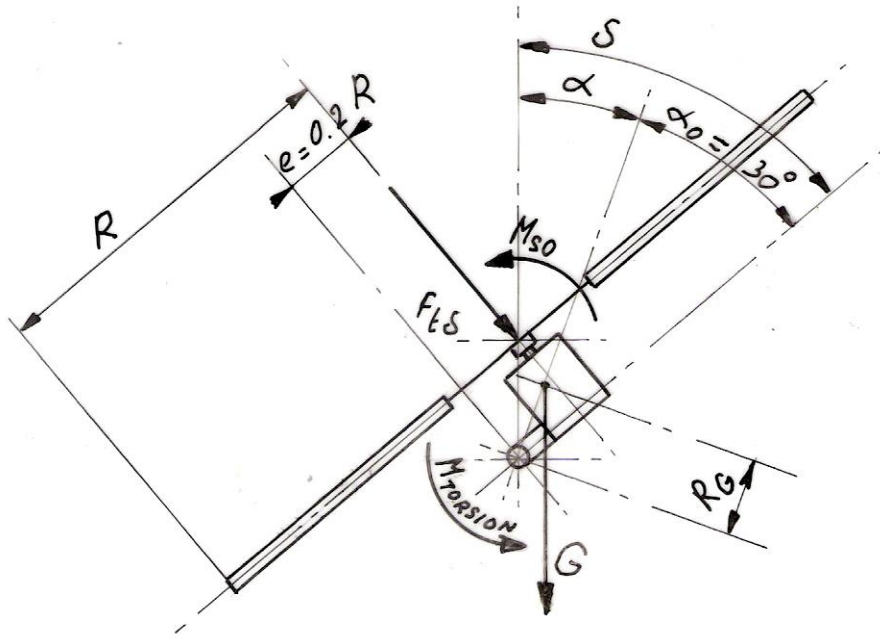


fig. 3 Side view of the pendulum safety system with a torsion spring for $\delta = 50^\circ$

The relation in between α , δ and α_0 is given by:

$$\alpha = \delta - \alpha_0 \quad (^\circ) \quad (15)$$

So $\alpha = -30^\circ$ for $\delta = 0^\circ$ and $\alpha_0 = 30^\circ$. For $\delta = 0^\circ$, the left hand moment M_G produced by G around the hinge axis is taken positive. The left hand moment M_G is therefore given by:

$$M_G = G * R_G * \sin(-\alpha) \quad (\text{Nm}) \quad (16)$$

(15) + (16) and $\alpha_0 = 30^\circ$ gives:

$$M_G = G * R_G * \sin(30^\circ - \delta) \quad (\text{Nm}) \quad (17)$$

M_G has an extreme value $M_{G \max}$ for $\alpha = 90^\circ$ and for $\alpha = -90^\circ$, so for $\delta = 120^\circ$ and for $\delta = -60^\circ$. So $M_{G \max}$ is given by:

$$M_{G \max} = G * R_G \quad (\text{Nm}) \quad (18)$$

So it is valid that:

$$M_G / M_{G \max} = \sin(30^\circ - \delta) \quad (-) \quad (19)$$

This function is given in figure 4 for $0^\circ < \delta < 90^\circ$.

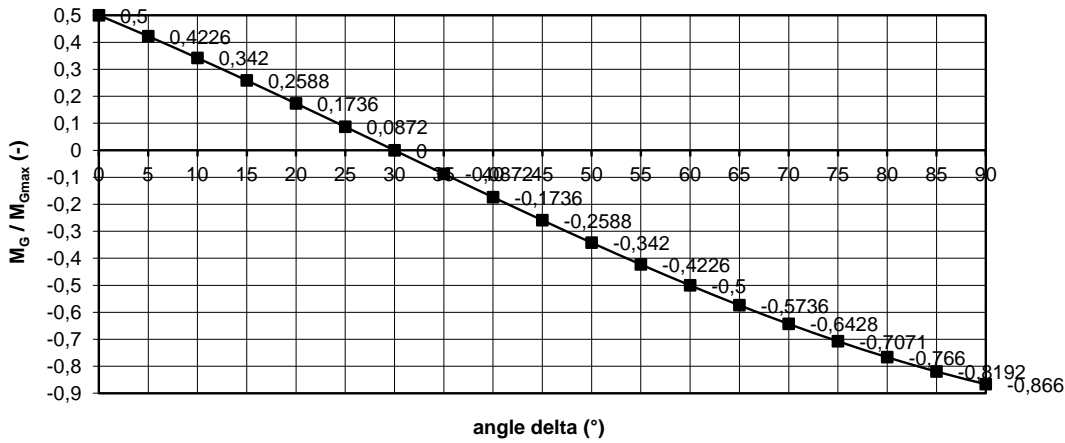


fig. 4 $M_G / M_{G \max}$ as a function of δ for $\alpha_0 = 30^\circ$

In figure 4 it can be seen that the $M_G / M_{G \max} - \delta$ curve is about a straight line for $0^\circ < \delta < 60^\circ$.

Apart from M_{rotor} and M_G there is also working a left hand moment M_{torsion} around the hinge axis caused by the torsion spring. The torsion spring is chosen such that $M_{\text{torsion}} = 0$ for $\delta = 0^\circ$. The torsion spring is also chosen such that $M_{\text{torsion}} = M_{G \max}$ for $\delta = 65^\circ$. M_{torsion} increases linear to δ , so M_{torsion} is given by:

$$M_{\text{torsion}} = G * R_G * \delta / 65^\circ \quad (\text{Nm}) \quad (20)$$

The ratio $M_{\text{torsion}} / M_{G \max}$ as a function of δ is given in figure 5.

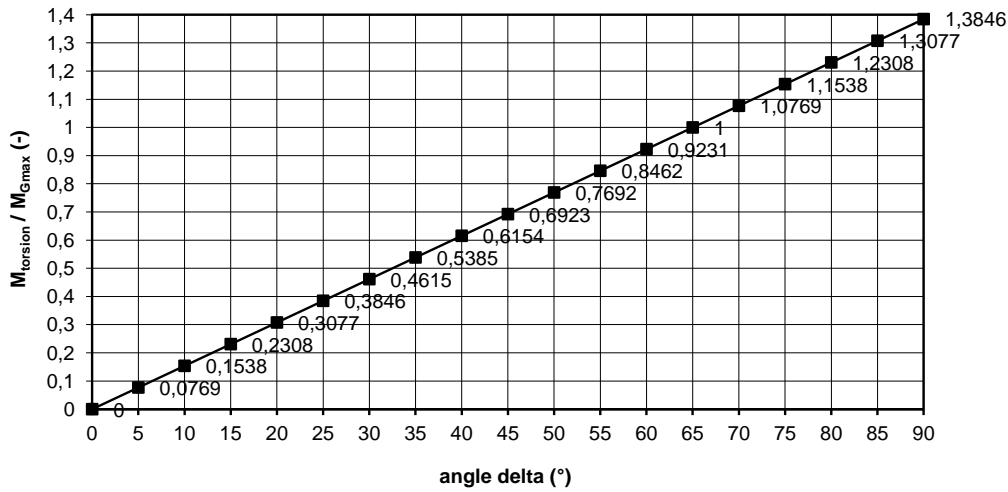


fig. 5 $M_{\text{torsion}} / M_{G\text{max}}$ as a function of δ

The total effect of $M_G / M_{G\text{max}} + M_{\text{torsion}} / M_{G\text{max}}$ can be shown by adding the curves of figure 4 and figure 5. This results in figure 6.

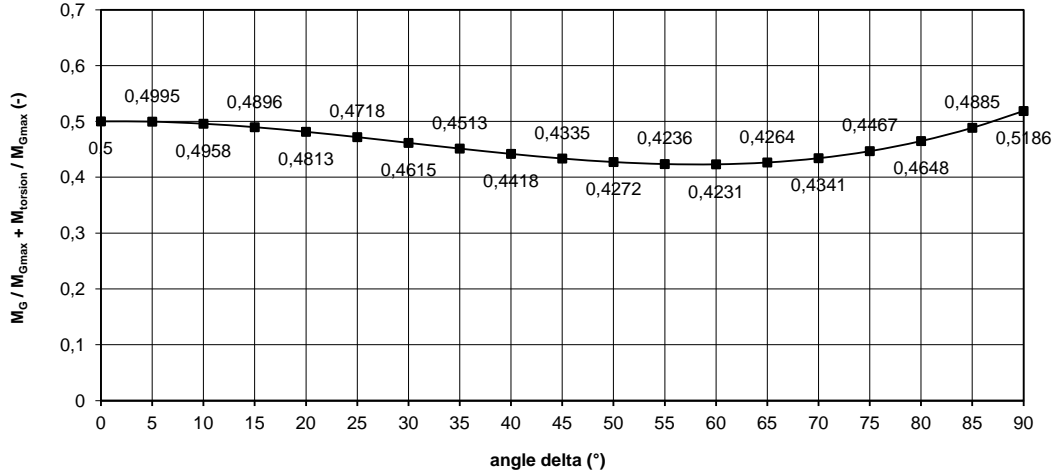


fig. 6 $M_G / M_{G\text{max}} + M_{\text{torsion}} / M_{G\text{max}}$ as a function of δ

In figure 6 it can be seen that the resulting moment is a little decreasing for $0^\circ < \delta < 60^\circ$. This decreasing partly compensates the self orientating moment. The decreasing curve prevents that the maximum rotational speed and thrust at high wind speeds are too high.

For a quasi-stationary situation there is balance of moments in between the right hand moment M_{rotor} and the left hand moments M_G and M_{torsion} . The moment equation is given by:

$$M_{\text{rotor}} = M_G + M_{\text{torsion}} \quad (21)$$

(13) + (17) + (20) + (21) gives:

$$\begin{aligned} \frac{1}{2}\rho V^2 * \pi R^3 * (0.2 * C_t * \cos^2\delta - 0.0225 \sin 3\delta) &= G * R_G * \{\sin(30^\circ - \delta) + \delta/65^\circ\} \quad \text{or} \\ \frac{1}{2}\rho V^2 * (0.2 * C_t * \cos^2\delta - 0.0225 \sin 3\delta) * \pi R^3 / (G * R_G) &= \sin(30^\circ - \delta) + \delta/65^\circ \\ \text{(for } 0^\circ < \delta < 40^\circ) & \end{aligned} \quad (22)$$

(14) + (17) + (20) + (21) gives:

$$\begin{aligned} \frac{1}{2}\rho V^2 * \pi R^3 \cos^2\delta * (0.2 * C_t - 0.0332) &= G * R_G * \{\sin(30^\circ - \delta) + \delta/65^\circ\} \quad \text{or} \\ \frac{1}{2}\rho V^2 * \cos^2\delta * (0.2 * C_t - 0.0332) * \pi R^3 / (G * R_G) &= \sin(30^\circ - \delta) + \delta/65^\circ \\ \text{(for } 40^\circ < \delta < 90^\circ) & \end{aligned} \quad (23)$$

The design wind speed V_d is defined as the wind speed for which the head just starts moving backwards but for which δ is still just 0° . It is assumed that all parameters of the safety system are chosen such that $V_d = 8$ m/s. For $V = V_d$ and $\delta = 0^\circ$ formula 22 changes into:

$$\begin{aligned} 0.2 * C_t * \frac{1}{2}\rho V_d^2 * \pi R^3 / (G * R_G) &= \sin 30^\circ \quad \text{or} \\ R^3 / (G * R_G) &= \sin 30^\circ / (0.2 * C_t * \pi * \frac{1}{2}\rho V_d^2) \end{aligned} \quad (24)$$

The thrust coefficient C_t is about 0.7 for a rotor running at the design tip speed ratio. The air density ρ is about 1.2 kg/m³ for air of 20 °C at sea level. It is chosen that $V_d = 8$ m/s. Substitution of these values in formula 24 gives:

$$R^3 / (G * R_G) = 0.0296 \quad \text{(for } V_d = 8 \text{ m/s)} \quad (25)$$

The rotor and head geometry has to be chosen such that equation 25 is fulfilled.

(22) + (25) gives:

$$\begin{aligned} \pi * 0.0296 * \frac{1}{2}\rho V^2 * (0.2 * C_t * \cos^2\delta - 0.0225 \sin 3\delta) &= \sin(30^\circ - \delta) + \delta/65^\circ \\ \text{(for } 0^\circ < \delta < 40^\circ) & \end{aligned} \quad (26)$$

Substitution of $\rho = 1.2$ kg/m³ and $C_t = 0.7$ (-) in formula 26 gives:

$$\begin{aligned} 0.0558 * V^2 * (0.14 * \cos^2\delta - 0.0225 \sin 3\delta) &= \sin(30^\circ - \delta) + \delta/65^\circ \quad \text{or} \\ V = \sqrt{[\{\sin(30^\circ - \delta) + \delta/65^\circ\} / \{0.0558 * (0.14 * \cos^2\delta - 0.0225 \sin 3\delta)\}]} & \\ \text{(for } 0^\circ < \delta < 40^\circ) & \end{aligned} \quad (27)$$

(23) + (25) gives:

$$\begin{aligned} \pi * 0.0296 * \frac{1}{2}\rho V^2 * \cos^2\delta * (0.2 * C_t - 0.0332) &= \sin(30^\circ - \delta) + \delta/65^\circ \\ \text{(for } 40^\circ < \delta < 90^\circ) & \end{aligned} \quad (28)$$

Substitution of $\rho = 1.2$ kg/m³ and $C_t = 0.7$ (-) in formula 28 gives:

$$\begin{aligned} 0.0558 * V^2 * \cos^2\delta * (0.14 - 0.0332) &= \sin(30^\circ - \delta) + \delta/65^\circ \quad \text{or} \\ 0.00596 * V^2 * \cos^2\delta &= \sin(30^\circ - \delta) + \delta/65^\circ \quad \text{or} \\ V = \sqrt{[\{\sin(30^\circ - \delta) + \delta/65^\circ\} / (0.00596 * \cos^2\delta)]} & \quad \text{(for } 40^\circ < \delta < 90^\circ) \end{aligned} \quad (29)$$

Next formula 27 and 29 are used to calculate V for different values of δ . It has been chosen that $\delta = 0^\circ, 10^\circ, 20^\circ, 30^\circ, 40^\circ, 50^\circ, 60^\circ, 70^\circ$ and 80° . The result is given in table 1.

δ ($^\circ$)	V (m/s)	$\cos\delta$	$\cos^2\delta$	$\cos^3\delta$	$V * \cos\delta$	$V^2 * \cos^2\delta$	$V^3 * \cos^3\delta$
0	8	1	1	1	8	64	512
10	8.4476	0.9848	0.9698	0.9551	8.319	69.207	575.770
20	9.1013	0.9397	0.8830	0.8298	8.552	73.142	625.581
30	10.0129	0.8660	0.75	0.6495	8.671	75.194	652.017
40	11.2392	0.7660	0.5868	0.4495	8.609	74.124	638.169
50	13.1714	0.6428	0.4132	0.2656	8.467	71.684	606.909
60	16.8506	0.5	0.25	0.125	8.425	70.986	598.076
70	24.9539	0.3420	0.1170	0.0400	8.534	72.856	621.549
80	50.8516	0.1736	0.0302	0.00524	8.828	78.094	689.041

table 1 Calculated relation in between δ and V for $V_d = 8$ m/s

In table 1 the values for $\cos\delta$, $\cos^2\delta$, $\cos^3\delta$, $V * \cos\delta$, $V^2 * \cos^2\delta$ and $V^3 * \cos^3\delta$ are also mentioned. $V * \cos\delta$ is an indication for the increase of the rotational speed (see formula 1). $V^2 * \cos^2\delta$ is an indication for the increase of the thrust and the torque (see formula 2 and 3). $V^3 * \cos^3\delta$ is an indication for the increase of the power (see formula 4). The values for δ as a function of V are given as the δ - V curve figure 7.

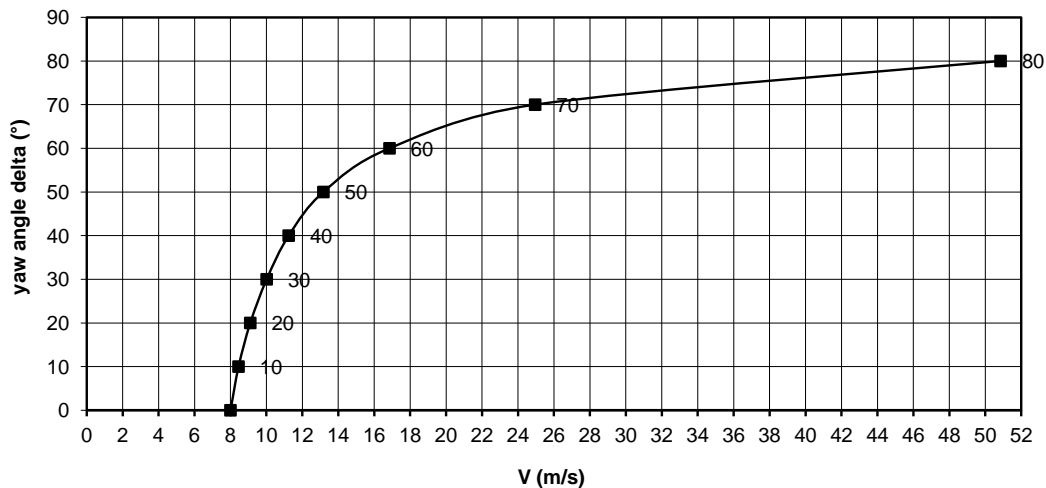


fig. 7 Calculated δ - V curve for the pendulum safety system with a torsion spring and a Gö 623 airfoil for $V_d = 8$ m/s

In table 1 and figure 7 it can be seen that a very large increase of the wind speed (from 24.9539 m/s up to 50.8516 m/s) is needed to increase the yaw angle from 70° to 80° . The helicopter position (for $\delta = 90^\circ$) will never be reached for stationary conditions. However, hard wind gusts at hurricanes or tornados will cause swinging movements resulting in reaching $\delta = 90^\circ$ for a short moment. To make the system tornado proof, it must be possible to fix the movement at $\delta = 90^\circ$, so there must be a stop and a kind of clamp at this angle. This clamp can work automatically and it will lock the rotor at $\delta = 90^\circ$. If this has happened, one has to unlock the system manually but as automatic locking will happen only during very high wind gusts, automatic locking is an acceptable option. It must be possible to turn the rotor to the helicopter position and to unlock it while standing on the tower at about 2/3 of the height.

High upwards wind speeds may occur in the central part of a tornado, so the rotor may start rotating even if the safety system is locked in the helicopter position. However, the rotor will rotate backwards if the wind comes from below and the airfoil will therefore have a lot of drag which strongly limits the rotational speed and the thrust. So the rotor will survive large upwards wind speeds. But there may be extremely strong tornados which will not be survived.

The calculated values of $V \cdot \cos \delta$ as a function of V are given in figure 8. This curve is an indication of the variation of the rotational speed for $V > V_d$.

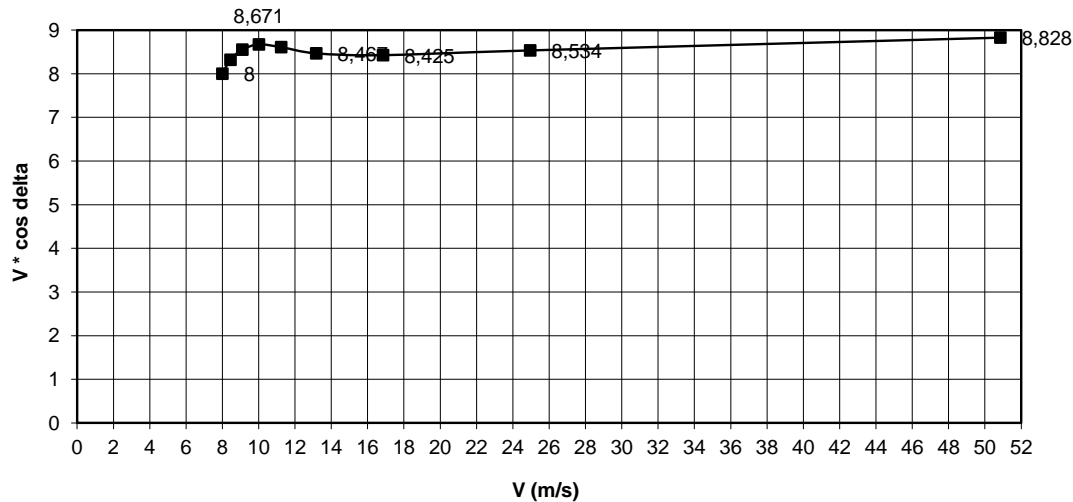


fig. 8 $V \cdot \cos \delta$ as a function of V for the pendulum safety system with a torsion spring and a Gö 623 airfoil for $V_d = 8$ m/s

In figure 8 it can be seen that the rotational speed is sharply limited and almost constant for $10 < V < 52$ m/s.

The calculated values of $V^2 \cdot \cos^2 \delta$ as a function of V are given in figure 9. This curve is an indication of the variation of the thrust and the torque for $V > V_d$.

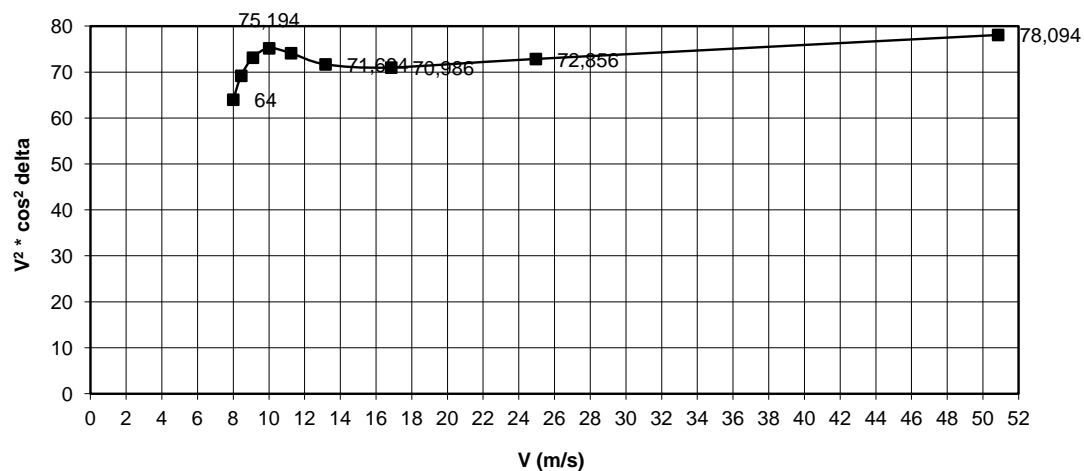


fig. 9 $V^2 \cdot \cos^2 \delta$ as a function of V for the pendulum safety system with a torsion spring and a Gö 623 airfoil for $V_d = 8$ m/s

In figure 9 it can be seen that the thrust and the torque is almost constant for $10 < V < 52$ m/s.

The calculated values of $V^3 * \cos^3 \delta$ as a function of V are given in figure 10. This curve is an indication of the variation of the power for $V > V_d$.

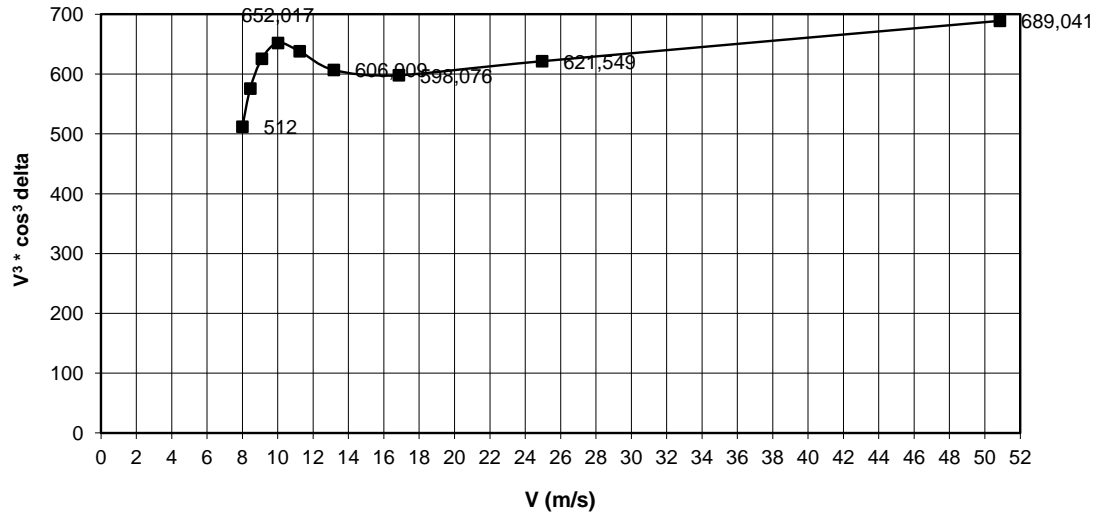


fig. 10 $V^3 * \cos^3 \delta$ as a function of V for the pendulum safety system with a torsion spring and a Gö 623 airfoil for $V_d = 8$ m/s

The maximum power for wind speeds below 40 m/s is generated at a wind speed of 10 m/s belonging to a yaw angle $\delta = 30^\circ$. This wind speed is called the rated wind speed V_{rated} . The power at $V_{rated} = 10$ m/s is a factor $652 / 512 = 1.273$ higher than at $V_d = 8$ m/s. The power is the mechanical power supplied by the rotor shaft. For the electrical power, the generator efficiency has to be taken into account.

4 Following variations of the wind direction

The horizontal hinge axis must be kept perpendicular to the wind direction, so the head must turn into the wind. This yawing of the head around the tower axis causes a gyroscopic moment perpendicular to the plane of the rotor axis and the tower axis. So this gyroscopic moment has a tendency to topple the rotor along the horizontal hinge axis. The direction of the gyroscopic moment depends on the direction of rotation of the rotor shaft and of the direction of rotation of the head along the tower axis. The rotor turns always in the same direction but the yawing along the tower axis is half the time left hand and half the right hand. So the gyroscopic moment has half the time a tendency to increase δ and half the time a tendency to decrease δ . As the safety system should mainly be influenced by variations of wind speed and preferably not by variations of wind direction, turning of the head into the wind must be done slowly.

A normal vane will turn the head too fast at high wind speeds. A system with side rotors which drive the head in the wind through a reducing gearing gives a very low yawing speed around the tower axis but this system is rather complicated and expensive. I have tested a so called double vane system on one of my earliest windmills, the DRIEKA-4, which had a rotor diameter of 4 m and a (very noisy) safety system with elastic air brakes on the blade tips.

It was a long horizontal pipe parallel to the rotor with a square sheet on each end of the pipe. Each sheet makes an angle of 20° with the rotor axis and the direction of the angles is chosen such that touching lines along the sheets intersect with the rotor axis before the rotor. Each sheet had a width and height of 500 mm and was made of 4 mm steel sheet. A photo of the DRIEKA-4 is given in figure 11.



fig. 11 DRIEKA-4 windmill with double vane and tree tower designed in about 1985

The moment of inertia of this vane is very large and fast head movements are therefore damped very well. For a windmill with the pendulum safety system, the optimum position of the pipe might be that its axis coincides with the horizontal hinge axis. For this position, the pipe is not hindering the swinging movement of the head. Because the hinge axis intersects with the tower axis, the weight of the vane exerts no moment on the yaw bearing housing.

5 Ideas about the torsion spring

Formula 20 gives the relation which has to be fulfilled to get a torsion spring which has the characteristic as given in figure 5. This formula shows that $M_{\text{torsion}} = 0$ for $\delta = 0^\circ$ and that M_{torsion} is $G * R_G$ for $\delta = 65^\circ$. G and R_G have to be chosen such that formula 25 is fulfilled for the chosen value of R , to realize the correct design wind speed. G is mainly the result of the weight of the rotor and the generator. It might be that the product of $G * R_G$ is too large for the chosen rotor and generator. In this case two balancing weights have to be added at the backside of the head to realize the correct product of $G * R_G$. The head must be designed such that the balancing weights don't hit the tower pipe. The head geometry has to be chosen such that $\alpha_0 = 30^\circ$ (see figure 3).

If the vane system is chosen which is described in chapter 4, it is logic to use two torsion springs which are mounted in the vane pipes. Each spring must give half the required torsion moment. So the torsion moment of one spring $M_{\text{torsion 1sp}}$ is given by:

$$M_{\text{torsion 1sp}} = G * R_G * \delta / 130^\circ \quad (\text{Nm}) \quad (30)$$

A torsion spring can be made out of a spring steel strip of which one end is connected to the end of a pipe and the other part is connected to the bearing housing of the horizontal hinge axis. The torsion stiffness of the pipe is very large with respect to the torsion stiffness of the strip, so it can be assumed that only the strip is twisted.

The specific torsion angle ϕ (in rad/mm) for a strip with a height h and a width b and a length of 1 mm is given by:

$$\phi = 3.6 M / \{t_m * b^3 * h^3 / (b^2 + h^2)\} \quad (\text{rad/mm}) \quad (31)$$

M is the torsion moment (in Nmm). t_m is the torsion modulus which is about $8.15 * 10^4$ N/mm² for spring steel. b and h are given in mm and $h > b$.

The maximum torsion stress τ is given by:

$$\tau = M / (2/9 b^2 * h) \quad (\text{N/mm}^2) \quad (32)$$

The determination of the spring geometry is out of the scope of this report because this can't be done without making a composite drawing of the head.

6 Use of the VIRYA-10 rotor and generator

The pendulum safety system with a torsion spring is meant for medium size wind turbines. For small wind turbines, I advise to use the hinged side vane safety system which is used in all small VIRYA wind turbines. However, for a certain rated wind speed, this safety system requires a certain ratio in between the vane area and the vane weight. To make the vane blade stiff enough, water proof ply wood has to be used for the bigger vane blades. Water proof ply wood is normally available in maximum standard sizes of 1.52 * 3.1 m and so the largest about square vane blade has dimensions 1.52 * 1.55 m. The biggest VIRYA wind turbine which has been designed with such a massive vane blade is the VIRYA-6.5. Bigger wind turbines with the hinged side vane safety system, require a hollow vane blade to make the vane blade stiff enough for a rated wind speed which is low enough.

The VIRYA-10 rotor calculations are given in report KD 715 (ref. 9). Assume that this rotor is used for the pendulum safety system with a torsion spring and that it has $V_d = 8$ m/s. So figure 7 up to 10 are valid for this wind turbine. The VIRYA-10 makes use of a Chinese axial flux generator of Hefei Top Grand type TGET770-H-10KW-100R which has a mass of 165 kg. The mass of the VIRYA-10 rotor is about 220 kg. Therefore it is rather easy to check if it is possible to use the pendulum safety system with a torsion spring for this wind turbine.

Chapter 3 gives the moment equations for a rotor with a Gö 623 airfoil. The VIRYA-10 has a rotor with a Gö 711 airfoil but it is assumed that the self orientating moment for a rotor with this airfoil is the same and so the same moment equations can be used. In chapter 3 it was assumed that the design wind speed $V_d = 8$ m/s and this value is also chosen for the VIRYA-10. So at this wind speed, the rotor moment is just the same as the moment caused by the total weight G of rotor and generator. The balance of moments for the design wind speed is given by formula 25. This formula can be written as:

$$G * R_G = R^3 / 0.0296 \quad (33)$$

The VIRYA-10 has a rotor radius $R = 5$ m. Substitution of this value in formula 33 gives:

$$G = 4223 / R_G \quad (\text{N}) \quad (34)$$

In this formula, G is the weight in N of the rotor, the generator and the bracket which connects the generator to the horizontal shaft around which the head is rotating. The weight of the bracket is neglected at this moment which means that the centre of gravity of the weight of the rotor and the generator is lying at the rotor axis.

R_G is the distance in between the centre of gravity and the hinge axis. The head geometry must be chosen such that $\alpha_0 = 30^\circ$ (see figure 3). If the centre of gravity is lying at the rotor axis it means that:

$$R_G = e / \cos \alpha_0 \quad (\text{m}) \quad (35)$$

In chapter 3 it was chosen that $e = 0.2 R$. As $R = 5 \text{ m}$ it means that $e = 1 \text{ m}$. Substitution of $e = 1 \text{ m}$ and $\alpha_0 = 30^\circ$ in formula 35 gives that $R_G = 1.155 \text{ m}$. Substitution of $R_G = 1.155 \text{ m}$ in formula 34 gives that $G = 3656 \text{ N}$. Next it must be checked if the real weight of the rotor and the generator is about 3656 N . The mass of the rotor plus the generator is $220 + 165 = 385 \text{ kg}$. This gives a weight of $405 * 9.81 = 3777 \text{ N}$ which is only a little higher than the required weight $G = 3656 \text{ N}$ for $V_d = 8 \text{ m/s}$.

There are two ways to solve this problem. One way is to add a balancing weight which moves along the tower and which is chosen such that formula 34 is fulfilled. But a balancing weight is an extra component and I don't like that. The other more elegant way is using a torsion spring which has a certain negative left hand spring moment for $\delta = 0^\circ$. If the torsion stiffness of the spring is kept the same, it means that the line of figure 5 moves downwards with a certain negative value at $\delta = 0^\circ$. This means that the line for the total moment of the spring and the weight together as given in figure 6, moves downwards with the same value. This results in decrease of the design wind speed. Changing the torsion moment at $\delta = 0^\circ$ is a simple way to change the design wind speed if it might appear for a prototype that the maximum rotational speed or the maximum power is too high.

For exact calculation of the wanted design wind speed of 8 m/s it is necessary to make a composite drawing of the head. The weight of the generator bracket has also to be taken into account and the centre of gravity has to be determined for all moving parts. The position of the rotor and the generator must be chosen such that the angle α_0 in between a line through the centre of gravity and a vertical line through the horizontal turning axis is 30° if the rotor position is vertical.

For a rotor diameter of 10 m , it seems possible to use two 6 m long pipes for the vane arms and to use vane blades of $1 * 1 \text{ m}$ for the vane system as described in chapter 4. The pipes are bolted by flanges to both sides of the head frame. The torsion springs can be mounted in these pipes.

It might be required to start with a tilt angle $\delta = 5^\circ$ to create enough distance in between the blade tips and the tower. It will also be required to introduce a hydraulic damper to prevent sudden changes of the yaw angle δ and to prevent that the head hits the stop for the lowest position too hard if the wind speed slows down suddenly from a high to a low value.

To make the system safe for use in tornado areas, the rotor must be locked automatically in the so called helicopter position for which $\delta = 90^\circ$. But it must be possible to unlock the rotor manually if the storm is over. It would also be nice if the rotor could be turned to the helicopter position manually if one wants to stop the rotor for a certain reason. But this mechanism should not influence the normal functioning of the movement steered by the rotor thrust. Determination of the exact head geometry for the VIRYA-10 rotor and generator bracket is out of the scope of this report.

I think that the pendulum safety system with a torsion spring can be used up to a rotor diameter of 20 m . However, a rotor diameter of 20 m would require vane blades of $2 * 2 \text{ m}$ and 12 m long vane arms if the double vane blade system is used to keep the rotor in the wind. This might be technically impossible or not wanted because of esthetics. So for this large rotor diameter it seems better to keep the rotor in the wind by a servo motor mounted in the head. If no vane pipes are available, the torsion springs can't be mounted in the pipes so another solution has to be found for the torsion springs.

7 Turning the rotor to the helicopter position

At the bottom of page 11 in chapter 3 it is said: “To make the system tornado proof, it must be possible to fix the movement at $\delta = 90^\circ$, so there must be a stop and a kind of clamp at this angle. This clamp can work automatically and it will lock the rotor at $\delta = 90^\circ$. If this has happened, one has to unlock the system manually but as automatic locking will happen only during very high wind gusts, automatic locking is an acceptable option. It must be possible to turn the rotor to the helicopter position and to unlock it while standing on the tower at about 2/3 of the height”.

This method might be acceptable for a small rotor and a low tower but for a big rotor, the moment which is required to turn the rotor to the helicopter position is rather high and can't be supplied by hand. Climbing in the tower to unlock the system manually is also not acceptable for a high tower. For a big rotor, automatic locking is therefore not an option. But then it must be possible to turn the rotor to the helicopter position by an electric motor.

This has certain advantages. If a big thunder storm is expected, the helicopter position is the safest position as all blades are always in parallel to any wind direction and therefore have the lowest drag. If there is another reason to stop the rotor, like shadow nuisance, stopping the rotor is very easy and no mechanical brake is needed.

However, this electric motor can't be connected to the swinging rotor permanently as the friction of the motor and the gear box will hinder the normal pendulant movement of the rotor. Another point is that the system must stay in the helicopter position even if the electric power which drives the motor would disappear. This can be realized by using a worm wheel gear box with a gear ratio of at least 1 : 40. For such a gear box, the motor can drive a load with a high torque but the load can't drive the motor because the worm wheel is self braking in this direction.

A special construction is required in between the slow gear box shaft and the horizontal shaft of the pendulum. It is assumed that the rotor shaft has a tilting angle of 5° to make that there is enough space in between the blade tips and the tower. So this construction must allow a movement of the pendulum from $\delta = 5^\circ$ up to $\delta = 90^\circ$ without turning of the slow gear box shaft. Detailed description of this construction is out of the scope of this report as it requires making of a composite drawing of the head. But a similar construction is also sometimes used in wheels of all terrain cars.

The stops at $\delta = 5^\circ$ and at $\delta = 90^\circ$ must be elastic and the electric motor must stop automatically if these stops are reached. The movement from a big angle δ to a small angle δ must be slowed down by a hydraulic damper.

8 References

- 1 Kragten A. Safety systems for small wind turbines which turn the rotor out of the wind at high wind speeds, February 2012, reviewed May 2016, free public report KD 485, engineering office Kragten Design, Populierenlaan 51, 5492 SG Sint-Oedenrode, The Netherlands.
- 2 Kragten A. Method to check the estimated δ -V curve of the hinged side vane system and checking of the δ -V curve of the VIRY-4.2 windmill, December 2004, free public report KD 213, engineering office Kragten Design, Populierenlaan 51, 5492 SG Sint-Oedenrode, The Netherlands.
- 3 Kragten A. Development of an ecliptic safety system with a torsion spring, February 2009, reviewed May 2016, free public report KD 409, engineering office Kragten Design, Populierenlaan 51, 5492 SG Sint-Oedenrode, The Netherlands.
- 4 Kragten A. Description of the inclined hinge main vane safety system and determination of the moment equations, December 2009, free public report KD 431, engineering office Kragten Design, Populierenlaan 51, 5492 SG Sint-Oedenrode, The Netherlands.
- 5 Kragten A. Development of a tornado proof pendulum safety system for a medium size wind turbine which turns the rotor out of the wind along an horizontal axis, April 2008, reviewed November 2019, free public report KD 377, engineering office Kragten Design, Populierenlaan 51, 5492 SG Sint-Oedenrode, The Netherlands.
- 6 Kragten A. Development of a pendulum safety system with a torsion spring and $e = 0.4 R$. March 2010, report KD 438, engineering office Kragten Design, Populierenlaan 51, 5492 SG Sint-Oedenrode, The Netherlands.
- 7 Kragten A. Rotor design and marching for horizontal axis wind turbines, January 1999, reviewed February 2017, free public report KD 35, engineering office Kragten Design, Populierenlaan 51, 5492 SG Sint-Oedenrode, The Netherlands.
- 8 Kragten A. Windtunnelmetingen aan het kantelrotormechanisme ter beveiliging van windmolens (in Dutch), report R 344 D, July 1978, (former) Wind Energy Group, Faculty of Fluid Dynamics, Department of Physics, University of Technology Eindhoven, The Netherlands (no longer available).
- 9 Kragten A. Calculations executed for the 3-bladed rotor of the VIRYA-10 windmill ($\lambda_d = 6$) with the pendulum safety system with a torsion spring connected to the generator type TGET770-H-10KW-100R for grid connection, April 2021, reviewed October 2021, public report KD 715, engineering office Kragten Design, Populierenlaan 51, 5492 SG Sint-Oedenrode, The Netherlands.